

The logo consists of a large orange rounded rectangle. Inside, the word "PROGRESS" is written in a light orange, sans-serif font. Below it, the word "ARTIX" is written in a larger, white, bold, sans-serif font.

# PROGRESS<sup>®</sup> ARTIX<sup>®</sup>

## Developing Interceptors for the Java Runtime

Version 5.6, August 2011

## **Progress Software**

Publication date 11 Aug 2011

Copyright © 2001-2011 Progress Software Corporation and/or its subsidiaries or affiliates.

### ***Legal Notices***

These materials and all Progress software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

Actional, Apama, Artix, Business Empowerment, DataDirect (and design), DataDirect Connect, DataDirect Connect64, DataDirect Technologies, DataDirect XML Converters, DataDirect XQuery, DataXtend, Dynamic Routing Architecture, EdgeXtend, Empowerment Center, Fathom, Fuse Mediation Router, Fuse Message Broker, Fuse Services Framework, IntelliStream, IONA, Making Software Work Together, Mindreef, ObjectStore, OpenEdge, Orbix, PeerDirect, POSSENET, Powered by Progress, PowerTier, Progress, Progress DataXtend, Progress Dynamics, Progress Business Empowerment, Progress Empowerment Center, Progress Empowerment Program, Progress OpenEdge, Progress Profiles, Progress Results, Progress Software Developers Network, Progress Sonic, ProVision, PS Select, Savvion, SequelLink, Shadow, SOAPscope, SOAPStation, Sonic, Sonic ESB, SonicMQ, Sonic Orchestration Server, SpeedScript, Stylus Studio, Technical Empowerment, WebSpeed, Xcalia (and design), and Your Software, Our Technology-Experience the Connection are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries. AccelEvent, Apama Dashboard Studio, Apama Event Manager, Apama Event Modeler, Apama Event Store, Apama Risk Firewall, AppsAlive, AppServer, ASPen, ASP-in-a-Box, BusinessEdge, Business Making Progress, Cache-Forward, CloudEdge, DataDirect Spy, DataDirect SupportLink, Fuse, FuseSource, Future Proof, GVAC, High Performance Integration, ObjectStore Inspector, ObjectStore Performance Expert, OpenAccess, Orbacus, Pantero, POSSE, ProDataSet, Progress Arcade, Progress CloudEdge, Progress Control Tower, Progress ESP Event Manager, Progress ESP Event Modeler, Progress Event Engine, Progress RFID, Progress RPM, Progress Software Business Making Progress, PSE Pro, SectorAlliance, SeeThinkAct, Shadow z/Services, Shadow z/Direct, Shadow z/Events, Shadow z/Presentation, Shadow Studio, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Sonic Business Integration Suite, Sonic Process Manager, Sonic Collaboration Server, Sonic Continuous Availability Architecture, Sonic Database Service, Sonic Workbench, Sonic XML Server, The Brains Behind BAM, WebClient, and Who Makes Progress are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Third Party Acknowledgements -- See [Third Party Acknowledgements on page 16](#).

# Table of Contents

<b>Preface</b> .....	<b>11</b>
What is Covered in This Book .....	12
Who Should Read This Book .....	13
Organization of this Guide .....	14
The Artix ESB Documentation Library .....	15
Third Party Acknowledgements .....	16
<b>Interceptors in the Artix ESB Runtime</b> .....	<b>19</b>
<b>The Interceptor APIs</b> .....	<b>25</b>
<b>Determining When the Interceptor is Invoked</b> .....	<b>27</b>
Specifying an Interceptor's Phase .....	28
Constraining an Interceptors Placement in a Phase .....	31
<b>Implementing the Interceptors Processing Logic</b> .....	<b>35</b>
Processing Messages .....	36
Unwinding After an Error .....	39
<b>Configuring Endpoints to Use Interceptors</b> .....	<b>41</b>
Deciding Where to Attach Interceptors .....	42
Adding Interceptors Using Configuration .....	44
Adding Interceptors Programmatically .....	47
Using the InterceptorProvider API .....	48
Using Java Annotations .....	52
<b>Manipulating Interceptor Chains on the Fly</b> .....	<b>55</b>
<b>A. Artix ESB Message Processing Phases</b> .....	<b>59</b>
<b>B. Artix ESB Provided Interceptors</b> .....	<b>63</b>
Core Artix ESB Interceptors .....	64
Front-Ends .....	65
Message Bindings .....	67
Other Features .....	70
<b>C. Interceptor Providers</b> .....	<b>73</b>
Index .....	75



# List of Figures

1. Artix ESB Interceptor Chains .....	20
2. An Interceptor Phase .....	28
3. Flow Through an Interceptor .....	35



# List of Tables

1. Interceptor Chain Configuration Elements .....	44
2. Interceptor Chain Annotations .....	52
A.1. Inbound Message Processing Phases .....	59
A.2. Inbound Message Processing Phases .....	60
B.1. Core Inbound Interceptors .....	64
B.2. Inbound JAX-WS Interceptors .....	65
B.3. Outbound JAX-WS Interceptors .....	65
B.4. Inbound JAX-RS Interceptors .....	66
B.5. Outbound JAX-RS Interceptors .....	66
B.6. Inbound SOAP Interceptors .....	67
B.7. Outbound SOAP Interceptors .....	68
B.8. Inbound XML Interceptors .....	68
B.9. Outbound XML Interceptors .....	69
B.10. Inbound CORBA Interceptors .....	69
B.11. Outbound CORBA Interceptors .....	69
B.12. Inbound Logging Interceptors .....	70
B.13. Outbound Logging Interceptors .....	70
B.14. Inbound WS-Addressing Interceptors .....	70
B.15. Outbound WS-Addressing Interceptors .....	70
B.16. Inbound WS-RM Interceptors .....	71
B.17. Outbound WS-RM Interceptors .....	71



# List of Examples

1. The <code>Interceptor</code> Interface .....	25
2. The <code>PhaseInterceptor</code> Interface .....	26
3. Setting an Interceptor's Phase .....	29
4. Methods for Adding an Interceptor Before Other Interceptors .....	31
5. Specifying a List of Interceptors that Must Run After the Current Interceptor .....	32
6. Methods for Adding an Interceptor After Other Interceptors .....	33
7. Specifying a List of Interceptors that Must Run Before the Current Interceptor .....	33
8. Getting the Message Exchange .....	37
9. Getting Messages from a Message Exchange .....	37
10. Checking the Direction of a Message Chain .....	37
11. Example Message Processing Method .....	37
12. Handling an Unwinding Interceptor Chain .....	39
13. Attaching Interceptors to the Bus .....	45
14. Attaching Interceptors to a JAX-WS Service Provider .....	45
15. The <code>InterceptorProvider</code> Interface .....	48
16. Attaching an Interceptor to a Consumer Programmatically .....	49
17. Attaching an Interceptor to a Service Provider Programmatically .....	50
18. Attaching an Interceptor to a Bus .....	51
19. Syntax for Listing Interceptors in a Chain Annotation .....	53
20. Attaching Interceptors to a Service Implementation .....	53
21. Method for Getting an Interceptor Chain .....	56
22. Methods for Adding Interceptors to an Interceptor Chain .....	56
23. Adding an Interceptor to an Interceptor Chain On-the-fly .....	56
24. Methods for Adding Interceptors to an Interceptor Chain .....	57
25. Adding an Interceptor to an Interceptor Chain On-the-fly .....	57



# Preface

What is Covered in This Book .....	12
Who Should Read This Book .....	13
Organization of this Guide .....	14
The Artix ESB Documentation Library .....	15
Third Party Acknowledgements .....	16

## What is Covered in This Book

This book describes how to develop interceptors for the Artix ESB Java Runtime runtime. It also describes how to configure your applications to use these custom interceptors.

## Who Should Read This Book

This book is intended for developers who are very comfortable with Java programming and using the Java APIs geared toward manipulating XML documents and SOAP messages. Developers reading this book should also have an understanding of distributed application design and the low-level details of how endpoints in a distributed application communicate.

## Organization of this Guide

This guide is organized to reflect how a developer will walk through the process of developing an interceptor for the Artix ESB Java Runtime runtime. The introduction lays out the basic concepts and the subsequent chapters describe the one step of the development process.

# The Artix ESB Documentation Library

For information on the organization of the Artix ESB library, the document conventions used, and where to find additional resources, see [Using the Artix ESB Library](#)<sup>1</sup>.

See the entire documentation set at the [Artix Product Documentation Web Site](#)<sup>2</sup>

---

<sup>1</sup> [http://documentation.progress.com/output/lona/artix/5.6/library\\_intro/library\\_intro.pdf](http://documentation.progress.com/output/lona/artix/5.6/library_intro/library_intro.pdf)

<sup>2</sup> <http://communities.progress.com/pcom/docs/DOC-106903>

## Third Party Acknowledgements

Progress Artix ESB v5.6 incorporates Apache Commons Codec v1.2 from The Apache Software Foundation. Such technology is subject to the following terms and conditions: The Apache Software License, Version 1.1 - Copyright (c) 2001-2003 The Apache Software Foundation. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgement: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>)." Alternately, this acknowledgement may appear in the software itself, if and wherever such third-party acknowledgements normally appear.
4. The names "Apache", "The Jakarta Project", "Commons", and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact [apache@apache.org](mailto:apache@apache.org).
5. Products derived from this software may not be called "Apache", "Apache" nor may "Apache" appear in their name without prior written permission of the Apache Software Foundation.

THIS SOFTWARE IS PROVIDED ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---

---

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation. For more information on the Apache Software Foundation, please see <http://www.apache.org/>.

Progress Artix ESB v5.6 incorporates Jcraft JSCH v0.1.44 from Jcraft. Such technology is subject to the following terms and conditions: Copyright (c) 2002-2010 Atsuhiko Yamanaka, JCraft, Inc. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. The names of the authors may not be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL JCRAFT, INC. OR ANY CONTRIBUTORS TO THIS SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.



# Interceptors in the Artix ESB Runtime


*Most of the functionality in the Artix ESB runtime is implemented by interceptors. Every endpoint created by the Artix ESB runtime has three potential interceptor chains for processing messages. The interceptors in these chains are responsible for transforming messages between the raw data transported across the wire and the Java objects handled by the endpoint's implementation code. The interceptors are organized into phases to ensure that processing happens on the proper order.*

## Overview

A large part of what Artix ESB does entails processing messages. When a consumer makes an invocation on a remote service the runtime needs to marshal the data into a message the service can consume and place it on the wire. The service provider must unmarshal the message, execute its business logic, and marshal the response into the appropriate message format. The consumer must then unmarshal the response message, correlate it to the proper request, and pass it back to the consumer's application code. In addition to the basic marshaling and unmarshaling, the Artix ESB runtime may do a number of other things with the message data. For example, if WS-RM is activated, the runtime must process the message chunks and acknowledgement messages before marshaling and unmarshaling the message. If security is activated, the runtime must validate the message's credentials as part of the message processing sequence.

[Figure 1 on page 20](#) shows the basic path that a request message takes when it is received by a service provider.

Figure 1. Artix ESB Interceptor Chains

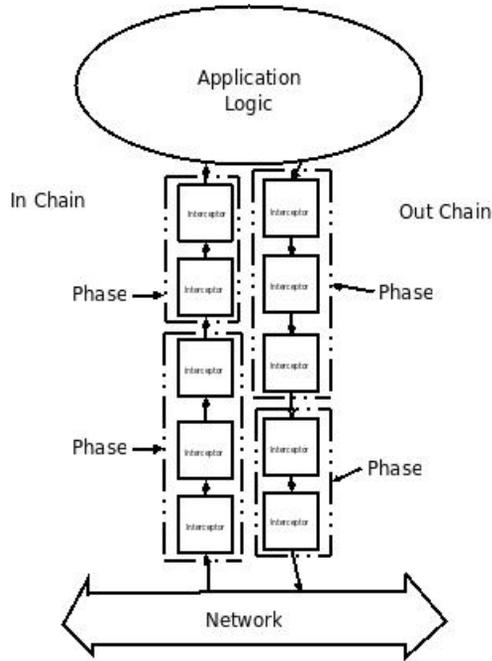

**Message processing in Artix ESB**

When a Artix ESB developed consumer invokes a remote service the following message processing sequence is started:

1. The Artix ESB runtime creates an outbound interceptor chain to process the request.
2. If the invocation starts a two-way message exchange, the runtime creates an inbound interceptor chain and a fault processing interceptor chain.
3. The request message is passed sequentially through the outbound interceptor chain.

Each interceptor in the chain performs some processing on the message. For example, the Artix ESB supplied SOAP interceptors package the message in a SOAP envelope.

4. If any of the interceptors on the outbound chain create an error condition the chain is unwound and control is returned to the application level code.

An interceptor chain is unwound by calling the fault processing method on all of the previously invoked interceptors.

5. The request is dispatched to the appropriate service provider.
6. When the response is received, it is passed sequentially through the inbound interceptor chain.



## Note

If the response is an error message, it is passed into the fault processing interceptor chain.

7. If any of the interceptors on the inbound chain create an error condition, the chain is unwound.
8. When the message reaches the end of the inbound interceptor chain, it is passed back to the application code.

When a Artix ESB developed service provider receives a request from a consumer, a similar process takes place:

1. The Artix ESB runtime creates an inbound interceptor chain to process the request message.
2. If the request is part of a two-way message exchange, the runtime also creates an outbound interceptor chain and a fault processing interceptor chain.
3. The request is passed sequentially through the inbound interceptor chain.
4. If any of the interceptors on the inbound chain create an error condition, the chain is unwound and a fault is dispatched to the consumer.

An interceptor chain is unwound by calling the fault processing method on all of the previously invoked interceptors.

5. When the request reaches the end of the inbound interceptor chain, it is passed to the service implementation.

6. When the response is ready it is passed sequentially through the outbound interceptor chain.



## Note

If the response is an exception, it is passed through the fault processing interceptor chain.

7. If any of the interceptors on the outbound chain create an error condition, the chain is unwound and a fault message is dispatched.
8. Once the request reaches the end of the outbound chain, it is dispatched to the consumer.

---

## Interceptors

All of the message processing in the Artix ESB runtime is done by *interceptors*. Interceptors are POJOs that have access to the message data before it is passed to the application layer. They can do a number of things including: transforming the message, stripping headers off of the message, or validating the message data. For example, an interceptor could read the security headers off of a message, validate the credentials against an external security service, and decide if message processing can continue.

The message data available to an interceptor is determined by a number of factors:

- the interceptor's chain
- the interceptor's phase
- the other interceptors that occur earlier in the chain

---

## Phases

Interceptors are organized into *phases*. A phase is a logical grouping of interceptors with common functionality. Each phase is responsible for a specific type of message processing. For example, interceptors that process the marshaled Java objects that are passed to the application layer would all occur in the same phase.

---

## Interceptor chains

Phases are aggregated into *interceptor chains*. An interceptor chain is a list of interceptor phases that are ordered based on whether messages are inbound or outbound.

Each endpoint created using Artix ESB has three interceptor chains:

- a chain for inbound messages
- a chain for outbound messages
- a chain for error messages

Interceptor chains are primarily constructed based on the choice of binding and transport used by the endpoint. Adding other runtime features, such as security or logging, also add interceptors to the chains. Developers can also add custom interceptors to a chain using configuration.

---

## Developing interceptors

Developing an interceptor, regardless of its functionality, always follows the same basic procedure:

1. [Determine which abstract interceptor class to extend.](#)

Artix ESB provides a number of abstract interceptors to make it easier to develop custom interceptors.

2. [Determine the phase in which the interceptor will run.](#)

Interceptors require certain parts of a message to be available and require the data to be in a certain format. The contents of the message and the format of the data is partially determined by an interceptor's phase.

3. [Determine if there are any other interceptors that must be executed either before or after the interceptor.](#)

In general, the ordering of interceptors within a phase is not important. However, in certain situations it may be important to ensure that an interceptor is executed before, or after, other interceptors in the same phase.

4. [Implement the interceptor's message processing logic.](#)

5. [Implement the interceptor's fault processing logic.](#)

If an error occurs in the active interceptor chain after the interceptor has executed, its fault processing logic is invoked.

6. [Attach the interceptor to one of the endpoint's interceptor chains.](#)



# The Interceptor APIs

Interceptors implement the `PhaseInterceptor` interface which extends the base `Interceptor` interface. This interface defines a number of methods used by the Artix ESB's runtime to control interceptor execution and are not appropriate for application developers to implement. To simplify interceptor development, Artix ESB provides a number of abstract interceptor implementations that can be extended.

## Interfaces

All of the interceptors in Artix ESB implement the base `Interceptor` interface shown in [Example 1 on page 25](#).

### Example 1. The `Interceptor` Interface

```
package org.apache.cxf.interceptor;

public interface Interceptor<T extends Message>
{
    void handleMessage(T message) throws Fault;

    void handleFault(T message);
}
```

The `Interceptor` interface defines the two methods that a developer needs to implement for a custom interceptor:

#### `handleMessage()`

The `handleMessage()` method does most of the work in an interceptor.

It is called on each interceptor in a message chain and receives the contents of the message being processed. Developers implement the message processing logic of the interceptor in this method. For detailed information about implementing the `handleMessage()` method, see

[Processing Messages on page 36](#).

#### `handleFault()`

The `handleFault()` method is called on an interceptor when normal message processing has been interrupted. The runtime calls the `handleFault()` method of each invoked interceptor in reverse order as it unwinds an interceptor chain. For detailed information about implementing the `handleFault()` method, see

[Unwinding After an Error on page 39](#).

Most interceptors do not directly implement the `Interceptor` interface. Instead, they implement the `PhaseInterceptor` interface shown in [Example 2 on page 26](#). The `PhaseInterceptor` interface adds four methods that allow an interceptor to participate in interceptor chains.

**Example 2. The `PhaseInterceptor` Interface**

```
package org.apache.cxf.phase;
...

public interface PhaseInterceptor<T extends Message> extends
    Interceptor<T>
{
    Set<String> getAfter();

    Set<String> getBefore();

    String getId();

    String getPhase();
}
```

**Abstract interceptor class**

Instead of directly implementing the `PhaseInterceptor` interface, developers should extend the `AbstractPhaseInterceptor` class. This abstract class provides implementations for the phase management methods of the `PhaseInterceptor` interface. The `AbstractPhaseInterceptor` class also provides a default implementation of the `handleFault()` method.

Developers need to provide an implementation of the `handleMessage()` method. They can also provide a different implementation for the `handleFault()` method. The developer-provided implementations can manipulate the message data using the methods provided by the generic `org.apache.cxf.message.Message` interface.

For applications that work with SOAP messages, Artix ESB provides an `AbstractSoapInterceptor` class. Extending this class provides the `handleMessage()` method and the `handleFault()` method with access to the message data as an `org.apache.cxf.binding.soap.SoapMessage` object. `SoapMessage` objects have methods for retrieving the SOAP headers, the SOAP envelope, and other SOAP metadata from the message.

# Determining When the Interceptor is Invoked

*Interceptors are organized into phases. The phase in which an interceptor runs determines what portions of the message data it can access. An interceptor can determine its location in relationship to the other interceptors in the same phase. The interceptor's phase and its location within the phase are set as part of the interceptor's constructor logic.*

Specifying an Interceptor's Phase .....	28
Constraining an Interceptors Placement in a Phase .....	31

When developing a custom interceptor, the first thing to consider is where in the message processing chain the interceptor belongs. The developer can control an interceptor's position in the message processing chain in one of two ways:

- Specifying the interceptor's phase
- Specifying constraints on the location of the interceptor within the phase

Typically, the code specifying an interceptor's location is placed in the interceptor's constructor. This makes it possible for the runtime to instantiate the interceptor and put in the proper place in the interceptor chain without any explicit action in the application level code.

## Specifying an Interceptor's Phase


### Overview

Interceptors are organized into phases. An interceptor's phase determines when in the message processing sequence it is called. Developers specify an interceptor's phase its constructor. Phases are specified using constant values provided by the framework.

### Phase

Phases are a logical collection of interceptors. As shown in [Figure 2 on page 28](#), the interceptors within a phase are called sequentially.

Figure 2. An Interceptor Phase

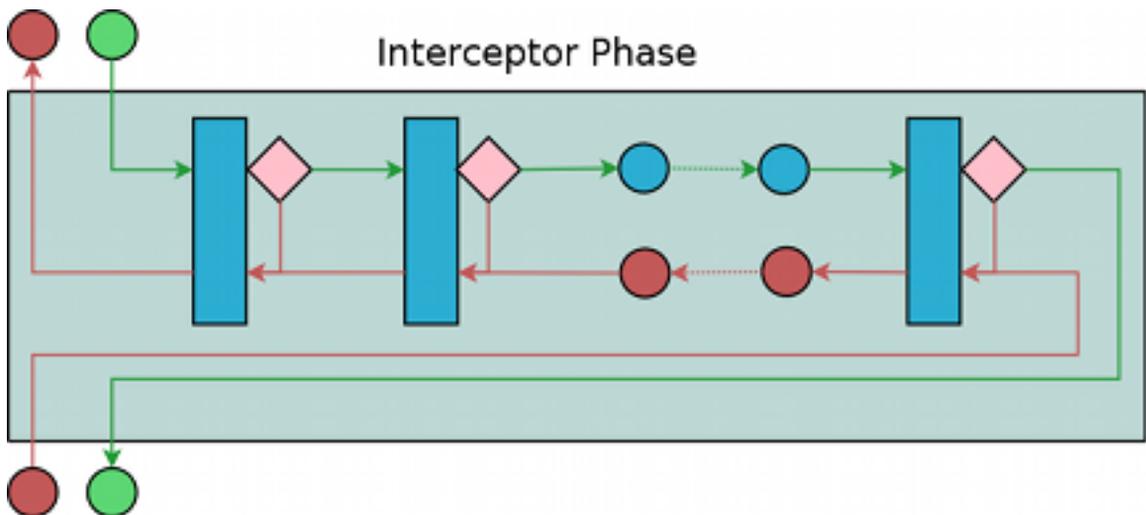

The phases are linked together in an ordered list to form an interceptor chain and provide defined logical steps in the message processing procedure. For example, a group of interceptors in the `RECEIVE` phase of an inbound interceptor chain processes transport level details using the raw message data picked up from the wire.

There is, however, no enforcement of what can be done in any of the phases. It is recommended that interceptors within a phase adhere to tasks that are in the spirit of the phase.

The complete list of phases defined by Artix ESB can be found in [Appendix A on page 59](#).

### Specifying a phase

Artix ESB provides the `org.apache.cxf.Phase` class to use for specifying a phase. The class is a collection of constants. Each phase defined by Artix ESB has a corresponding constant in the `Phase` class. For example, the `RECEIVE` phase is specified by the value `Phase.RECEIVE`.

### Setting the phase

An interceptor's phase is set in the interceptor's constructor. The `AbstractPhaseInterceptor` class defines three constructors for instantiating an interceptor:

- `public AbstractPhaseInterceptor(String phase)`—sets the phase of the interceptor to the specified phase and automatically sets the interceptor's id to the interceptor's class name.



### Tip

This constructor will satisfy most use cases.

- `public AbstractPhaseInterceptor(String id, String phase)`—sets the interceptor's id to the string passed in as the first parameter and the interceptor's phase to the second string.
- `public AbstractPhaseInterceptor(String phase, boolean uniqueId)`—specifies if the interceptor should use a unique, system generated id. If the `uniqueId` parameter is `true`, the interceptor's id will be calculated by the system. If the `uniqueId` parameter is `false` the interceptor's id is set to the interceptor's class name.

The recommended way to set a custom interceptor's phase is to pass the phase to the `AbstractPhaseInterceptor` constructor using the `super()` method as shown in [Example 3 on page 29](#).

### Example 3. Setting an Interceptor's Phase

```
import org.apache.cxf.message.Message;
import org.apache.cxf.phase.AbstractPhaseInterceptor;
import org.apache.cxf.phase.Phase;
```

## Determining When the Interceptor is Invoked

```
public class StreamInterceptor extends AbstractPhaseInterceptor<Message>
{
    public StreamInterceptor()
    {
        super (Phase.PRE_STREAM) ;
    }
}
```

The `StreamInterceptor` interceptor shown in [Example 3 on page 29](#) is placed into the `PRE_STREAM` phase.

# Constraining an Interceptors Placement in a Phase

## Overview

Placing an interceptor into a phase may not provide fine enough control over its placement to ensure that the interceptor works properly. For example, if an interceptor needed to inspect the SOAP headers of a message using the SAAJ APIs, it would need to run after the interceptor that converts the message into a SAAJ object. There may also be cases where one interceptor consumes a part of the message needed by another interceptor. In these cases, a developer can supply a list of interceptors that must be executed before their interceptor. A developer can also supply a list of interceptors that must be executed after their interceptor.



## Important

The runtime can only honor these lists within the interceptor's phase. If a developer places an interceptor from an earlier phase in the list of interceptors that must execute after the current phase, the runtime will ignore the request.

---

## Add to the chain before

One issue that arises when developing an interceptor is that the data required by the interceptor is not always present. This can occur when one interceptor in the chain consumes message data required by a later interceptor. Developers can control what a custom interceptor consumes and possibly fix the problem by modifying their interceptors. However, this is not always possible because a number of interceptors are used by Artix ESB and a developer cannot modify them.

An alternative solution is to ensure that a custom interceptor is placed before any interceptors that will consume the message data the custom interceptor requires. The easiest way to do that would be to place it in an earlier phase, but that is not always possible. For cases where an interceptor needs to be placed before one or more other interceptors the Artix ESB's `AbstractPhaseInterceptor` class provides two `addBefore()` methods.

As shown in [Example 4 on page 31](#), one takes a single interceptor id and the other takes a collection of interceptor ids. You can make multiple calls to continue adding interceptors to the list.

### **Example 4. Methods for Adding an Interceptor Before Other Interceptors**

```
public void addBefore(String i);
```

```
public void addBefore(Collection<String> i);
```

As shown in [Example 5 on page 32](#), a developer calls the `addBefore()` method in the constructor of a custom interceptor.

**Example 5. Specifying a List of Interceptors that Must Run After the Current Interceptor**

```
public class MyPhasedOutInterceptor extends AbstractPhaseIn
terceptor
{
    public MyPhasedOutInterceptor() {
        super(Phase.PRE_LOGICAL);
        addBefore(HolderOutInterceptor.class.getName());
    }
    ...
}
```



**Tip**

Most interceptors use their class name for an interceptor id.

**Add to the chain after**

Another reason the data required by the interceptor is not present is that the data has not been placed in the message object. For example, an interceptor may want to work with the message data as a SOAP message, but it will not work if it is placed in the chain before the message is turned into a SOAP message. Developers can control what a custom interceptor consumes and possibly fix the problem by modifying their interceptors. However, this is not always possible because a number of interceptors are used by Artix ESB and a developer cannot modify them.

An alternative solution is to ensure that a custom interceptor is placed after the interceptor, or interceptors, that generate the message data the custom interceptor requires. The easiest way to do that would be to place it in a later phase, but that is not always possible. The `AbstractPhaseInterceptor` class provides two `addAfter()` methods for cases where an interceptor needs to be placed after one or more other interceptors.

As shown in [Example 6 on page 33](#), one method takes a single interceptor id and the other takes a collection of interceptor ids. You can make multiple calls to continue adding interceptors to the list.

**Example 6. Methods for Adding an Interceptor After Other Interceptors**

```
public void addAfter(String i);  
  
public void addAfter(Collection<String> i);
```

As shown in [Example 7 on page 33](#), a developer calls the `addAfter()` method in the constructor of a custom interceptor.

**Example 7. Specifying a List of Interceptors that Must Run Before the Current Interceptor**

```
public class MyPhasedOutInterceptor extends AbstractPhaseIn  
terceptor  
{  
  
    public MyPhasedOutInterceptor() {  
        super(Phase.PRE_LOGICAL);  
        addAfter(StartingOutInterceptor.class.getName());  
    }  
  
    ...  
}
```

**Tip**

Most interceptors use their class name for an interceptor id.




# Implementing the Interceptors Processing Logic

Interceptors are straightforward to implement. The bulk of their processing logic is in the `handleMessage()` method. This method receives the message data and manipulates it as needed. Developers may also want to add some special logic to handle fault processing cases.

Processing Messages .....	36
Unwinding After an Error .....	39

Figure 3 on page 35 shows the process flow through an interceptor.

Figure 3. Flow Through an Interceptor

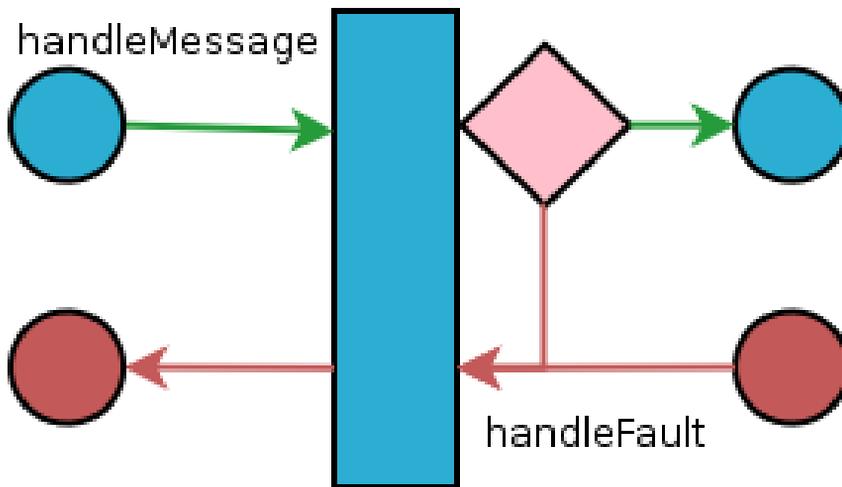

In normal message processing, only the `handleMessage()` method is called. The `handleMessage()` method is where the interceptor's message processing logic is placed.

If an error occurs in the `handleMessage()` method of the interceptor, or any subsequent interceptor in the interceptor chain, the `handleFault()` method is called. The `handleFault()` method is useful for cleaning up after an interceptor in the event of an error. It can also be used to alter the fault message.

## Processing Messages

### Overview

In normal message processing, an interceptor's `handleMessage()` method is invoked. It receives that message data as a `Message` object. Along with the actual contents of the message, the `Message` object may contain a number of properties related to the message or the message processing state. The exact contents of the `Message` object depends on the interceptors preceding the current interceptor in the chain.

---

### Getting the message contents

The `Message` interface provides two methods that can be used in extracting the message contents:

- `public <T> T getContent(java.lang.Class<T> format);`

The `getContent()` method returns the content of the message in an object of the specified class. If the contents are not available as an instance of the specified class, null is returned. The list of available content types is determined by the interceptor's location on the interceptor chain and the direction of the interceptor chain.

- `public Collection<Attachment> getAttachments();`

The `getAttachments()` method returns a Java `Collection` object containing any binary attachments associated with the message. The attachments are stored in `org.apache.cxf.message.Attachment` objects. `Attachment` objects provide methods for managing the binary data.



### Important

Attachments are only available after the attachment processing interceptors have executed.

---

### Determining the message's direction

The direction of a message can be determined by querying the message exchange. The message exchange stores the inbound message and the outbound message in separate properties.<sup>1</sup>

The message exchange associated with a message is retrieved using the message's `getExchange()` method. As shown in [Example 8 on page 37](#),

---

<sup>1</sup>It also stores inbound and outbound faults separately.

`getExchange()` does not take any parameters and returns the message exchange as a `org.apache.cxf.message.Exchange` object.

### **Example 8. Getting the Message Exchange**

```
Exchange getExchange();
```

The `Exchange` object has four methods, shown in [Example 9 on page 37](#), for getting the messages associated with an exchange. Each method will either return the message as a `org.apache.cxf.Message` object or it will return null if the message does not exist.

### **Example 9. Getting Messages from a Message Exchange**

```
Message getInMessage();
Message getInFaultMessage();
Message getOutMessage();
Message getOutFaultMessage();
```

[Example 10 on page 37](#) shows code for determining if the current message is outbound. The method gets the message exchange and checks to see if the current message is the same as the exchange's outbound message. It also checks the current message against the exchanges outbound fault message to error messages on the outbound fault interceptor chain.

### **Example 10. Checking the Direction of a Message Chain**

```
public static boolean isOutbound()
{
    Exchange exchange = message.getExchange();
    return message != null
        && exchange != null
        && (message == exchange.getOutMessage()
            || message == exchange.getOutFaultMessage());
}
```

### **Example**

[Example 11 on page 37](#) shows code for an interceptor that processes zip compressed messages. It checks the direction of the message and then performs the appropriate actions.

### **Example 11. Example Message Processing Method**

```
import java.io.IOException;
import java.io.InputStream;
```

## Implementing the Interceptors Processing Logic

```
import java.util.zip.GZIPInputStream;

import org.apache.cxf.message.Message;
import org.apache.cxf.phase.AbstractPhaseInterceptor;
import org.apache.cxf.phase.Phase;

public class StreamInterceptor extends AbstractPhaseInterceptor<Message>
{
    ...

    public void handleMessage(Message message)
    {
        boolean isOutbound = false;
        isOutbound = message == message.getExchange().getOutMessage()
            || message == message.getExchange().getOutFaultMessage();

        if (!isOutbound)
        {
            try
            {
                InputStream is = message.getContent(InputStream.class);
                GZIPInputStream zipInput = new GZIPInputStream(is);
                message.setContent(InputStream.class, zipInput);
            }
            catch (IOException ioe)
            {
                ioe.printStackTrace();
            }
        }
        else
        {
            // zip the outbound message
        }
    }
    ...
}
```

# Unwinding After an Error

## Overview

When an error occurs during the execution of an interceptor chain, the runtime stops traversing the interceptor chain and unwinds the chain by calling the `handleFault()` method of any interceptors in the chain that have already been executed.

The `handleFault()` method can be used to clean up any resources used by an interceptor during normal message processing. It can also be used to rollback any actions that should only stand if message processing completes successfully. In cases where the fault message will be passed on to an outbound fault processing interceptor chain, the `handleFault()` method can also be used to add information to the fault message.

---

## Getting the message payload

The `handleFault()` method receives the same `Message` object as the `handleMessage()` method used in normal message processing. Getting the message contents from the `Message` object is described in [Getting the message contents on page 36](#).

---

## Example

[Example 12 on page 39](#) shows code used to ensure that the original XML stream is placed back into the message when the interceptor chain is unwound.

### **Example 12. Handling an Unwinding Interceptor Chain**

```
@Override
public void handleFault(SoapMessage message)
{
    super.handleFault(message);
    XMLStreamWriter writer = (XMLStreamWriter)message.get(ORIGINAL_XML_WRITER);
    if (writer != null)
    {
        message.setContent(XMLStreamWriter.class, writer);
    }
}
```



# Configuring Endpoints to Use Interceptors

*Interceptors are added to an endpoint when it is included in a message exchange. The endpoint's interceptor chains are constructed from a the interceptor chains of a number of components in the Artix ESB runtime. Interceptors are specified in either then endpoint's configuration or the configuration of one of the runtime components. Interceptors can be added using either the configuration file or the interceptor API.*

Deciding Where to Attach Interceptors .....	42
Adding Interceptors Using Configuration .....	44
Adding Interceptors Programmatically .....	47
Using the InterceptorProvider API .....	48
Using Java Annotations .....	52

## Deciding Where to Attach Interceptors

### Overview

There are a number of runtime objects that host interceptor chains. These include:

- the endpoint object
- the service object
- the proxy object
- the factory object used to create the endpoint or the proxy
- the binding
- the central `Bus` object

A developer can attach their own interceptors to any of these objects. The most common objects to attach interceptors are the bus and the individual endpoints. Choosing the correct object requires understanding how these runtime objects are combined to make an endpoint.

---

### Endpoints and proxies

Attaching interceptors to either the endpoint or the proxy is the most fine grained way to place an interceptor. Any interceptors attached directly to an endpoint or a proxy only effect the specific endpoint or proxy. This is a good place to attach interceptors that are specific to a particular incarnation of a service. For example, if a developer wants to expose one instance of a service that converts units from metric to imperial they could attach the interceptors directly to one endpoint.

---

### Factories

Using the Spring configuration to attach interceptors to the factories used to create an endpoint or a proxy has the same effect as attaching the interceptors directly to the endpoint or proxy. However, when interceptors are attached to a factory programmatically the interceptors attached to the factory are propagated to every endpoint or proxy created by the factory.

---

### Bindings

Attaching interceptors to the binding allows the developer to specify a set of interceptors that are applied to all endpoints that use the binding. For example, if a developer wants to force all endpoints that use the raw XML binding to

include a special ID element, they could attach the interceptor responsible for adding the element to the XML binding.

---

## **Buses**

The most general place to attach interceptors is the bus. When interceptors are attached to the bus, the interceptors are propagated to all of the endpoints managed by that bus. Attaching interceptors to the bus is useful in applications that create multiple endpoints that share a similar set of interceptors.

---

## **Combining attachment points**

Because an endpoint's final set of interceptor chains is an amalgamation of the interceptor chains contributed by the listed objects, several of the listed object can be combined in a single endpoint's configuration. For example, if an application spawned multiple endpoints that all required an interceptor that checked for a validation token, that interceptor would be attached to the application's bus. If one of those endpoints also required an interceptor that converted Euros into dollars, the conversion interceptor would be attached directly to the specific endpoint.

## Adding Interceptors Using Configuration

### Overview

The easiest way to attach interceptors to an endpoint is using the configuration file. Each interceptor to be attached to an endpoint is configured using a standard Spring bean. The interceptor's bean can then be added to the proper interceptor chain using Artix ESB configuration elements.

Each runtime component that has an associated interceptor chain is configurable using specialized Spring elements. Each of the component's elements have a standard set of children for specifying their interceptor chains. There is one child for each interceptor chain associated with the component. The children list the beans for the interceptors to be added to the chain.

### Configuration elements

[Table 1 on page 44](#) describes the four configuration elements for attaching interceptors to a runtime component.

**Table 1. Interceptor Chain Configuration Elements**

Element	Description
<code>inInterceptors</code>	Contains a list of beans configuring interceptors to add to an endpoint's inbound interceptor chain.
<code>outInterceptors</code>	Contains a list of beans configuring interceptors to add to an endpoint's outbound interceptor chain.
<code>inFaultInterceptors</code>	Contains a list of beans configuring interceptors to add to an endpoint's inbound fault processing interceptor chain.
<code>outFaultInterceptors</code>	Contains a list of beans configuring interceptors to add to an endpoint's outbound fault processing interceptor chain.

All of the interceptor chain configuration elements take a `list` child element. The `list` element has one child for each of the interceptors being attached to the chain. Interceptors can be specified using either a `bean` element directly configuring the interceptor or a `ref` element that refers to a `bean` element that configures the interceptor.

### Examples

[Example 13 on page 45](#) shows configuration for attaching interceptors to a `bus`' inbound interceptor chain.

**Example 13. Attaching Interceptors to the Bus**

```

<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:cxf="http://cxf.apache.org/core"
  xmlns:http="http://cxf.apache.org/transports/http/configuration"
  xsi:schemaLocation="
    http://cxf.apache.org/core http://cxf.apache.org/schemas/core.xsd
    http://cxf.apache.org/transports/http/configuration http://cxf.apache.org/schemas/con
figuration/http-conf.xsd
    http://www.springframework.org/schema/beans http://www.springframe
work.org/schema/beans/spring-beans.xsd">
  ...
  <bean id="GZIPStream" class="demo.stream.interceptor.StreamInterceptor"/>

  <cxf:bus>
    <cxf:inInterceptors>
      <list>
        <ref bean="GZIPStream"/>
      </list>
    </cxf:inInterceptors>
  </cxf:bus>
</beans>

```

[Example 14 on page 45](#) shows configuration for attaching an interceptor to a JAX-WS service's outbound interceptor chain.

**Example 14. Attaching Interceptors to a JAX-WS Service Provider**

```

<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:jaxws="http://cxf.apache.org/jaxws"
  xmlns:wsa="http://cxf.apache.org/ws/addressing"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
    http://www.springframework.org/schema/beans/spring-beans.xsd">

  <jaxws:endpoint ...>
    <jaxws:outInterceptors>
      <list>
        <bean id="GZIPStream" class="demo.stream.interceptor.StreamInterceptor" />
      </list>
    </jaxws:outInterceptors>

```

```
</jaxws:endpoint>  
</beans>
```

---

**More information**

For more information about configuring endpoints using the Spring configuration see [Artix<sup>®</sup> ESB Deployment Guide](#).

# Adding Interceptors Programmatically

Using the <code>InterceptorProvider</code> API .....	48
Using Java Annotations .....	52

Interceptors can be attached to endpoints programmatically using either one of two approaches:

- the `InterceptorProvider` API
- Java annotations

Using the `InterceptorProvider` API allows the developer to attach interceptors to any of the runtime components that have interceptor chains, but it requires working with the underlying Artix ESB classes. The Java annotations can only be added to service interfaces or service implementations, but they allow developers to stay within the JAX-WS API or the JAX-RS API.

## Using the InterceptorProvider API

### Overview

Interceptors can be registered with any component that implements the `InterceptorProvider` interface, as shown in [Example 15 on page 48](#).

#### **Example 15. The `InterceptorProvider` Interface**

```
package org.apache.cxf.interceptor;

import java.util.List;

public interface InterceptorProvider
{
    List<Interceptor<? extends Message>> getInInterceptors();

    List<Interceptor<? extends Message>> getOutInterceptors();

    List<Interceptor<? extends Message>> getInFaultInterceptors();

    List<Interceptor<? extends Message>> getOutFaultInterceptors();
}
```

The four methods in the interface allow you to retrieve each of an endpoint's interceptor chains as a Java `List` object. Using the methods offered by the Java `List` object, developers can add and remove interceptors to any of the chains.

### Procedure

To use the `InterceptorProvider` API to attach an interceptor to a runtime component's interceptor chain, do the following:

1. Get access to the runtime component with the chain to which the interceptor is being attached.

Developers will need to use Artix ESB specific APIs to access the runtime components from standard Java application code. The runtime components are usually accessible by casting the JAX-WS or JAX-RS artifacts into the underlying Artix ESB objects.

2. Create an instance of the interceptor.
3. Use the proper get method to retrieve the desired interceptor chain.

- Use the `List` object's `add()` method to attach the interceptor to the interceptor chain.



## Tip

This step is usually combined with that of retrieving the interceptor chain.

### Attaching an interceptor to a consumer

[Example 16 on page 49](#) shows code for attaching an interceptor to the inbound interceptor chain of a JAX-WS consumer.

#### *Example 16. Attaching an Interceptor to a Consumer Programmatically*

```
package com.fusesource.demo;

import java.io.File;
import java.net.URL;
import javax.xml.namespace.QName;
import javax.xml.ws.Service;

import org.apache.cxf.endpoint.ClientProxy;
import org.apache.cxf.endpoint.ClientProxy;

public class Client
{
    public static void main(String args[])
    {
        QName serviceName = new QName("http://demo.eric.org", "stockQuoteReporter");
        Service s = Service.create(serviceName); ❶

        QName portName = new QName("http://demo.eric.org", "stockQuoteReporterPort");
        s.addPort(portName, "http://schemas.xmlsoap.org/soap/", "http://localhost:9000/EricStock
Quote"); ❷

        quoteReporter proxy = s.getPort(portName, quoteReporter.class); ❸

        Client cxfClient = ClientProxy.getClient(proxy); ❹

        ValidateInterceptor validInterceptor = new ValidateInterceptor(); ❺
        cxfClient.getInInterceptors().add(validInterceptor); ❻

        ...
    }
}
```

The code in [Example 16 on page 49](#) does the following:

- ❶ Creates a JAX-WS `Service` object for the consumer.
- ❷ Adds a port to the `Service` object that provides the consumer's target address.
- ❸ Creates the proxy used to invoke methods on the service provider.
- ❹ Gets the Artix ESB `Client` object associated with the proxy.
- ❺ Creates an instance of the interceptor.
- ❻ Attaches the interceptor to the inbound interceptor chain.

### Attaching an interceptor to a service provider

[Example 17 on page 50](#) shows code for attaching an interceptor to a service provider's outbound interceptor chain.

#### *Example 17. Attaching an Interceptor to a Service Provider Programmatically*

```
package com.fusesource.demo;
import java.util.*;

import org.apache.cxf.endpoint.Server;
import org.apache.cxf.frontend.ServerFactoryBean;
import org.apache.cxf.frontend.EndpointImpl;

public class stockQuoteReporter implements quoteReporter
{
    ...
    public stockQuoteReporter()
    {
        ServerFactoryBean sfb = new ServerFactoryBean(); ❶
        Server server = sfb.create(); ❷
        EndpointImpl endpt = server.getEndpoint(); ❸

        AuthTokenInterceptor authInterceptor = new AuthTokenInterceptor(); ❹

        endpt.getOutInterceptors().add(authInterceptor); ❺
    }
}
```

The code in [Example 17 on page 50](#) does the following:

- ❶ Creates a `ServerFactoryBean` object that will provide access to the underlying Artix ESB objects.
- ❷ Gets the `Server` object that Artix ESB uses to represent the endpoint.

- ③ Gets the Artix ESB `EndpointImpl` object for the service provider.
  - ④ Creates an instance of the interceptor.
  - ⑤ Attaches the interceptor to the endpoint;s outbound interceptor chain.
- 

**Attaching an interceptor to a bus** [Example 18 on page 51](#) shows code for attaching an interceptor to a bus' inbound interceptor chain.

**Example 18. Attaching an Interceptor to a Bus**

```
import org.apache.cxf.BusFactory;
import org.apache.cxf.Bus;

...

Bus bus = BusFactory.getDefaultBus(); ❶

WatchInterceptor watchInterceptor = new WatchInterceptor(); ❷

bus.getInInterceptors().add(watchInterceptor); ❸

...
```

The code in [Example 18 on page 51](#) does the following:

- ❶ Gets the default bus for the runtime instance.
- ❷ Creates an instance of the interceptor.
- ❸ Attaches the interceptor to the inbound interceptor chain.

The `WatchInterceptor` will be attached to the inbound interceptor chain of all endpoints created by the runtime instance.

## Using Java Annotations

### Overview

Artix ESB provides four Java annotations that allow a developer to specify the interceptor chains used by an endpoint. Unlike the other means of attaching interceptors to endpoints, the annotations are attached to application-level artifacts. The artifact that is used determines the scope of the annotation's effect.

---

### Where to place the annotations

The annotations can be placed on the following artifacts:

- the service endpoint interface(SEI) defining the endpoint

If the annotations are placed on an SEI, all of the service providers that implement the interface and all of the consumers that use the SEI to create proxies will be affected.

- a service implementation class

If the annotations are placed on an implementation class, all of the service providers using the implementation class will be affected.

---

### The annotations

The annotations are all in the `org.apache.cxf.interceptor` package and are described in [Table 2 on page 52](#).

**Table 2. Interceptor Chain Annotations**

Annotation	Description
<code>InInterceptors</code>	Specifies the interceptors for the inbound interceptor chain.
<code>OutInterceptors</code>	Specifies the interceptors for the outbound interceptor chain.
<code>InFaultInterceptors</code>	Specifies the interceptors for the inbound fault interceptor chain.
<code>OutFaultInterceptors</code>	Specifies the interceptors for the outbound fault interceptor chain.

---

### Listing the interceptors

The list of interceptors is specified as a list of fully qualified class names using the syntax shown in [Example 19 on page 53](#).

**Example 19. Syntax for Listing Interceptors in a Chain Annotation**

```
interceptors={"interceptor1", "interceptor2", ..., "interceptorN"}
```

---

**Example**

[Example 20 on page 53](#) shows annotations that attach two interceptors to the inbound interceptor chain of endpoints that use the logic provided by `SayHiImpl`.

**Example 20. Attaching Interceptors to a Service Implementation**

```
import org.apache.cxf.interceptor.InInterceptors;

@InInterceptors(interceptors={"com.sayhi.interceptors.FirstLast", "com.sayhi.interceptors.Log
Name"})
public class SayHiImpl implements SayHi
{
    ...
}
```



# Manipulating Interceptor Chains on the Fly

*Interceptors can reconfigure an endpoint's interceptor chain as part of its message processing logic. It can add new interceptors, remove interceptors, reorder interceptors, and even suspend the interceptor chain. Any on-the-fly manipulation is invocation-specific, so the original chain is used each time an endpoint is involved in a message exchange.*

## Overview

Interceptor chains only live as long as the message exchange that sparked their creation. Each message contains a reference to the interceptor chain responsible for processing it. Developers can use this reference to alter the message's interceptor chain. Because the chain is per-exchange, any changes made to a message's interceptor chain will not effect other message exchanges.

---

## Chain life-cycle

Interceptor chains and the interceptors in the chain are instantiated on a per-invocation basis. When an endpoint is invoked to participate in a message exchange, the required interceptor chains are instantiated along with instances of its interceptors. When the message exchange that caused the creation of the interceptor chain is completed, the chain and its interceptor instances are destroyed.

This means that any changes you make to the interceptor chain or to the fields of an interceptor do not persist across message exchanges. So, if an interceptor places another interceptor in the active chain only the active chain is effected. Any future message exchanges will be created from a pristine state as determined by the endpoint's configuration. It also means that a developer cannot set flags in an interceptor that will alter future message processing.



## Tip

If an interceptor needs to pass information along to future instances, it can set a property in the message context. The context does persist across message exchanges.

---

## Getting the interceptor chain

The first step in changing a message's interceptor chain is getting the interceptor chain. This is done using the `Message.getInterceptorChain()`

method shown in [Example 21 on page 56](#). The interceptor chain is returned as a `org.apache.cxf.interceptor.InterceptorChain` object.

**Example 21. Method for Getting an Interceptor Chain**

```
InterceptorChain getInterceptorChain();
```

---

**Adding interceptors**

The `InterceptorChain` object has two methods, shown in [Example 22 on page 56](#), for adding interceptors to an interceptor chain. One allows you to add a single interceptor and the other allows you to add multiple interceptors.

**Example 22. Methods for Adding Interceptors to an Interceptor Chain**

```
void add(Interceptor i);  
void add(Collection<Interceptor> i);
```

[Example 23 on page 56](#) shows code for adding a single interceptor to a message's interceptor chain.

**Example 23. Adding an Interceptor to an Interceptor Chain On-the-fly**

```
void handleMessage(Message message)  
{  
    ...  
    AddledIntereptor addled = new AddledIntereptor(); ❶  
    InterceptorChain chain = message.getInterceptorChain(); ❷  
    chain.add(addled); ❸  
    ...  
}
```

The code in [Example 23 on page 56](#) does the following:

- ❶ Instantiates a copy of the interceptor to be added to the chain.



**Important**

The interceptor being added to the chain should be in either the same phase as the current interceptor or a latter phase than the current interceptor.

- ❷ Gets the interceptor chain for the current message.

- ③ Adds the new interceptor to the chain.
- 

## Removing interceptors

The `InterceptorChain` object has one method, shown in [Example 24 on page 57](#), for removing an interceptor from an interceptor chain.

### **Example 24. Methods for Adding Interceptors to an Interceptor Chain**

```
void remove(Interceptor i);
```

[Example 25 on page 57](#) shows code for removing an interceptor from a message's interceptor chain.

### **Example 25. Adding an Interceptor to an Interceptor Chain On-the-fly**

```
void handleMessage(Message message)
{
    ...
    SackedIntereptor sacked = new SackedIntereptor(); ❶
    InterceptorChain chain = message.getInterceptorChain(); ❷
    chain.remove(sacked); ❸
    ...
}
```

The code in [Example 25 on page 57](#) does the following:

- ❶ Instantiates a copy of the interceptor to be removed from the chain.



## Important

The interceptor being removed from the chain should be in either the same phase as the current interceptor or a latter phase than the current interceptor.

- ❷ Gets the interceptor chain for the current message.
- ❸ Removes the interceptor from the chain.



# Appendix A. Artix ESB Message Processing Phases

Inbound phases

[Table A.1 on page 59](#) lists the phases available in inbound interceptor chains.

**Table A.1. Inbound Message Processing Phases**

Phase	Description
RECEIVE	Performs transport specific processing, such as determining MIME boundaries for binary attachments.
PRE_STREAM	Processes the raw data stream received by the transport.
USER_STREAM	
POST_STREAM	
READ	Determines if a request is a SOAP or XML message and builds adds the proper interceptors. SOAP message headers are also processed in this phase.
PRE_PROTOCOL	Performs protocol level processing. This includes processing of WS-* headers and processing of the SOAP message properties.
USER_PROTOCOL	
POST_PROTOCOL	
UNMARSHAL	Unmarshals the message data into the objects used by the application level code.
PRE_LOGICAL	Processes the unmarshalled message data.
USER_LOGICAL	
POST_LOGICAL	
PRE_INVOKE	
INVOKE	Passes the message to the application code. On the server side, the service implementation is invoked in this phase. On the client side, the response is handed back to the application.

Phase	Description
POST_INVOKE	Invokes the outbound interceptor chain.

## Outbound phases

[Table A.2 on page 60](#) lists the phases available in inbound interceptor chains.

**Table A.2. Inbound Message Processing Phases**

Phase	Description
SETUP	Performs any set up that is required by later phases in the chain.
PRE_LOGICAL	Performs processing on the unmarshalled data passed from the application level.
USER_LOGICAL	
POST_LOGICAL	
PREPARE_SEND	Opens the connection for writing the message on the wire.
PRE_STREAM	Performs processing required to prepare the message for entry into a data stream.
PRE_PROTOCOL	Begins processing protocol specific information.
WRITE	Writes the protocol message.
PRE_MARSHAL	Marshals the message.
MARSHAL	
POST_MARSHAL	
USER_PROTOCOL	Process the protocol message.
POST_PROTOCOL	
USER_STREAM	Process the byte-level message.
POST_STREAM	
SEND	Sends the message and closes the transport stream.



## Important

Outbound interceptor chains have a mirror set of ending phases whose names are appended with `_ENDING`. The ending phases are

used interceptors that require some terminal action to occur before data is written on the wire.



# Appendix B. Artix ESB Provided Interceptors

Core Artix ESB Interceptors .....	64
Front-Ends .....	65
Message Bindings .....	67
Other Features .....	70

# Core Artix ESB Interceptors

## Inbound

[Table B.1 on page 64](#) lists the core inbound interceptors that are added to all Artix ESB endpoints.

**Table B.1. Core Inbound Interceptors**

Class	Phase	Description
ServiceInvokerInterceptor	INVOKE	Invokes the proper method on the service.

---

## Outbound

The Artix ESB does not add any core interceptors to the outbound interceptor chain by default. The contents of an endpoint's outbound interceptor chain depend on the features in use.

# Front-Ends

## JAX-WS

[Table B.2 on page 65](#) lists the interceptors added to a JAX-WS endpoint's inbound message chain.

**Table B.2. Inbound JAX-WS Interceptors**

Class	Phase	Description
HolderInInterceptor	PRE_INVOKE	Creates holder objects for any out or in/out parameters in the message.
WrapperClassInInterceptor	POST_LOGICAL	Unwraps the parts of a wrapped doc/literal message into the appropriate array of objects.
LogicalHandlerInInterceptor	PRE_PROTOCOL	Passes message processing to the JAX-WS logical handlers used by the endpoint. When the JAX-WS handlers complete, the message is passed along to the next interceptor on the inbound chain.
SOAPHandlerInterceptor	PRE_PROTOCOL	Passes message processing to the JAX-WS SOAP handlers used by the endpoint. The SOAP handlers complete, the message is passed along to the next interceptor in the chain.

[Table B.3 on page 65](#) lists the interceptors added to a JAX-WS endpoint's outbound message chain.

**Table B.3. Outbound JAX-WS Interceptors**

Class	Phase	Description
HolderOutInterceptor	PRE_LOGICAL	Removes the values of any out and in/out parameters from their holder objects and adds the values to the message's parameter list.
WebFaultOutInterceptor	PRE_PROTOCOL	Processes outbound fault messages.
WrapperClassOutInterceptor	PRE_LOGICAL	Makes sure that wrapped doc/literal messages and rpc/literal messages are properly wrapped before being added to the message.
LogicalHandlerOutInterceptor	PRE_MARSHAL	Passes message processing to the JAX-WS logical handlers used by the endpoint. When the JAX-WS handlers complete, the message is passed along to the next interceptor on the outbound chain.

Class	Phase	Description
SOAPHandlerInterceptor	PRE_PROTOCOL	Passes message processing to the JAX-WS SOAP handlers used by the endpoint. The SOAP handlers complete, the message is passed along to the next interceptor in the chain.
MessageSenderInterceptor	PREPARE_SEND	Calls back to the Destination object to have it setup the output streams, headers, etc. to prepare the outgoing transport.

## JAX-RS

[Table B.4 on page 66](#) lists the interceptors added to a JAX-RS endpoint's inbound message chain.

**Table B.4. Inbound JAX-RS Interceptors**

Class	Phase	Description
JAXRSInInterceptor	PRE_STREAM	Selects the root resource class, invokes any configured JAX-RS request filters, and determines the method to invoke on the root resource.



## Important

The inbound chain for a JAX-RS endpoint skips straight to the `ServiceInvokerInInterceptor` interceptor. No other interceptors will be invoked after the `JAXRSInInterceptor`.

[Table B.5 on page 66](#) lists the interceptors added to a JAX-RS endpoint's outbound message chain.

**Table B.5. Outbound JAX-RS Interceptors**

Class	Phase	Description
JAXRSOutInterceptor	MARSHAL	Marshals the response into the proper format for transmission.

# Message Bindings

## SOAP

Table B.6 on page 67 lists the interceptors added to a endpoint's inbound message chain when using the SOAP Binding.

**Table B.6. Inbound SOAP Interceptors**

Class	Phase	Description
<code>CheckFaultInterceptor</code>	POST_PROTOCOL	Checks if the message is a fault message. If the message is a fault message, normal processing is aborted and fault processing is started.
<code>MustUnderstandInterceptor</code>	PRE_PROTOCOL	Processes the must understand headers.
<code>RPCInInterceptor</code>	UNMARSHAL	Unmarshals rpc/literal messages. If the message is bare, the message is passed to a <code>BareInInterceptor</code> object to deserialize the message parts.
<code>ReadsHeadersInterceptor</code>	READ	Parses the SOAP headers and stores them in the message object.
<code>SoapActionInInterceptor</code>	READ	Parses the SOAP action header and attempts to find a unique operation for the action.
<code>SoapHeaderInterceptor</code>	UNMARSHAL	Binds the SOAP headers that map to operation parameters to the appropriate objects.
<code>AttachmentInInterceptor</code>	RECEIVE	Parses the mime headers for mime boundaries, finds the <i>root</i> part and resets the input stream to it, and stores the other parts in a collection of <code>Attachment</code> objects.
<code>DocLiteralInInterceptor</code>	UNMARSHAL	Examines the first element in the SOAP body to determine the appropriate operation and calls the data binding to read in the data.
<code>StaxInInterceptor</code>	POST_STREAM	Creates an <code>XMLStreamReader</code> object from the message.
<code>URIMappingInterceptor</code>	UNMARSHAL	Handles the processing of HTTP GET methods.
<code>SwAInInterceptor</code>	PRE_INVOKE	Creates the required MIME handlers for binary SOAP attachments and adds the data to the parameter list.

Table B.7 on page 68 lists the interceptors added to a endpoint's outbound message chain when using the SOAP Binding.

**Table B.7. Outbound SOAP Interceptors**

Class	Phase	Description
<code>RPCOutInterceptor</code>	MARSHAL	Marshals rpc style messages for transmission.
<code>SoapHeaderOutFilterInterceptor</code>	PRE_LOGICAL	Removes all SOAP headers that are marked as inbound only.
<code>SoapPreProtocolOutInterceptor</code>	POST_LOGICAL	Sets up the SOAP version and the SOAP action header.
<code>AttachmentOutInterceptor</code>	PRE_STREAM	Sets up the attachmentmarshallers and the mime stuff needed to process any attachments that may be in the message.
<code>BareOutInterceptor</code>	MARSHAL	Writes the message parts.
<code>StaxOutInterceptor</code>	PRE_STREAM	Creates an <code>XMLStreamWriter</code> objects from the message.
<code>WrappedOutInterceptor</code>	MARSHAL	Wraps the outbound message parameters.
<code>SoapOutInterceptor</code>	WRITE	Writes the <code>soap:envelope</code> element and the elements for the header blocks in the message. Also writes an empty <code>soap:body</code> element for the remaining interceptors to populate.
<code>SwAOutInterceptor</code>	PRE_LOGICAL	Removes any binary data that will be packaged as a SOAP attachment and stores it for later processing.

**XML**

[Table B.8 on page 68](#) lists the interceptors added to a endpoint's inbound message chain when using the XML Binding.

**Table B.8. Inbound XML Interceptors**

Class	Phase	Description
<code>AttachmentInInterceptor</code>	RECEIVE	Parses the mime headers for mime boundaries, finds the <code>root</code> part and resets the input stream to it, and stores the other parts in a collection of <code>Attachment</code> objects.
<code>DocLiteralInInterceptor</code>	UNMARSHAL	Examines the first element in the message body to determine the appropriate operation and calls the data binding to read in the data.
<code>StaxInInterceptor</code>	POST_STREAM	Creates an <code>XMLStreamReader</code> object from the message.
<code>URIMappingInterceptor</code>	UNMARSHAL	Handles the processing of HTTP GET methods.

Class	Phase	Description
XMLMessageInInterceptor	UNMARSHAL	Unmarshals the XML message.

[Table B.9 on page 69](#) lists the interceptors added to a endpoint's outbound message chain when using the XML Binding.

**Table B.9. Outbound XML Interceptors**

Class	Phase	Description
StaxOutInterceptor	PRE_STREAM	Creates an <code>XMLStreamWriter</code> objects from the message.
WrappedOutInterceptor	MARSHAL	Wraps the outbound message parameters.
XMLMessageOutInterceptor	MARSHAL	Marshals the message for transmission.

## CORBA

[Table B.10 on page 69](#) lists the interceptors added to a endpoint's inbound message chain when using the CORBA Binding.

**Table B.10. Inbound CORBA Interceptors**

Class	Phase	Description
CorbaStreamInInterceptor	PRE_STREAM	Deserializes the CORBA message.
BareInInterceptor	UNMARSHAL	Deserializes the message parts.

[Table B.11 on page 69](#) lists the interceptors added to a endpoint's outbound message chain when using the CORBA Binding.

**Table B.11. Outbound CORBA Interceptors**

Class	Phase	Description
CorbaStreamOutInterceptor	PRE_STREAM	Serializes the message.
BareOutInterceptor	MARSHAL	Writes the message parts.
CorbaStreamOutEndingInterceptor	USER_STREAM	Creates a streamable object for the message and stores it in the message context.

## Other Features

### Logging

[Table B.12 on page 70](#) lists the interceptors added to a endpoint's inbound message chain to support logging.

**Table B.12. Inbound Logging Interceptors**

Class	Phase	Description
LoggingInInterceptor	RECEIVE	Writes the raw message data to the logging system.

[Table B.13 on page 70](#) lists the interceptors added to a endpoint's outbound message chain to support logging.

**Table B.13. Outbound Logging Interceptors**

Class	Phase	Description
LoggingOutInterceptor	PRE_STREAM	Writes the outbound message to the logging system.

For more information about logging see [Artix ESB Logging](#) in *Artix® ESB Deployment Guide*.

---

### WS-Addressing

[Table B.14 on page 70](#) lists the interceptors added to a endpoint's inbound message chain when using WS-Addressing.

**Table B.14. Inbound WS-Addressing Interceptors**

Class	Phase	Description
MAPCodec	PRE_PROTOCOL	Decodes the message addressing properties.

[Table B.15 on page 70](#) lists the interceptors added to a endpoint's outbound message chain when using WS-Addressing.

**Table B.15. Outbound WS-Addressing Interceptors**

Class	Phase	Description
MAPAggregator	PRE_LOGICAL	Aggregates the message addressing properties for a message.
MAPCodec	PRE_PROTOCOL	Encodes the message addressing properties.

For more information about WS-Addressing see [Deploying WS-Addressing](#) in *Artix® ESB Deployment Guide*.

---

## WS-RM



### Important

WS-RM relies on WS-Addressing so all of the WS-Addressing interceptors will also be added to the interceptor chains.

[Table B.16 on page 71](#) lists the interceptors added to a endpoint's inbound message chain when using WS-RM.

**Table B.16. Inbound WS-RM Interceptors**

Class	Phase	Description
RMinInterceptor	PRE_LOGICAL	Handles the aggregation of message parts and acknowledgement messages.
RMSoapInterceptor	PRE_PROTOCOL	Encodes and decodes the WS-RM properties from messages.

[Table B.17 on page 71](#) lists the interceptors added to a endpoint's outbound message chain when using WS-RM.

**Table B.17. Outbound WS-RM Interceptors**

Class	Phase	Description
RMOutInterceptor	PRE_LOGICAL	Handles the chunking of messages and the transmission of the chunks. Also handles the processing of acknowledgements and resend requests.
RMSoapInterceptor	PRE_PROTOCOL	Encodes and decodes the WS-RM properties from messages.

For more information about WS-RM see [Enabling Reliable Messaging](#) in *Artix® ESB Deployment Guide*.



# Appendix C. Interceptor Providers

## Overview

Interceptor providers are objects in the Artix ESB runtime that have interceptor chains attached to them. They all implement the `org.apache.cxf.interceptor.InterceptorProvider` interface. Developers can attach their own interceptors to any interceptor provider.

---

## List of providers

The following objects are interceptor providers:

- `AddressingPolicyInterceptorProvider`
- `ClientFactoryBean`
- `ClientImpl`
- `ClientProxyFactoryBean`
- `CorbaBinding`
- `CXFBusImpl`
- `org.apache.cxf.jaxws.EndpointImpl`
- `org.apache.cxf.endpoint.EndpointImpl`
- `ExtensionManagerBus`
- `JAXRSClientFactoryBean`
- `JAXRSServerFactoryBean`
- `JAXRSServiceImpl`
- `JaxWsClientEndpointImpl`
- `JaxWsClientFactoryBean`
- `JaxWsEndpointImpl`

- JaxWsProxyFactoryBean
- JaxWsServerFactoryBean
- JaxwsServiceBuilder
- MTOMPolicyInterceptorProvider
- NoOpPolicyInterceptorProvider
- ObjectBinding
- RMPolicyInterceptorProvider
- ServerFactoryBean
- ServiceImpl
- SimpleServiceBuilder
- SoapBinding
- WrappedEndpoint
- WrappedService
- XMLBinding

# Index

## Symbols

@InFaultInterceptors, 52  
@InInterceptors, 52  
@OutFaultInterceptors, 52  
@OutInterceptors, 52

## A

AbstractPhaseInterceptor, 26  
    addAfter(), 32  
    addBefore(), 31  
    constructor, 29

## C

configuration  
    inbound fault interceptors, 44, 52  
    inbound interceptors, 44, 52  
    outbound fault interceptors, 44, 52  
    outbound interceptors, 44, 52

## E

Exchange  
    getInFaultMessage(), 36  
    getInMessage(), 36  
    getOutFaultMessage(), 36  
    getOutMessage(), 36

## H

handleFault(), 39  
handleMessage(), 36

## I

inFaultInterceptors, 44  
inInterceptors, 44  
interceptor  
    definition, 22  
    life-cycle, 55  
Interceptor, 25

interceptor chain  
    definition, 22  
    life-cycle, 55  
    programmatic configuration, 47  
    Spring configuration, 44  
InterceptorChain  
    add(), 56  
    remove(), 57

## M

Message  
    getAttachments(), 36  
    getContent(), 36  
    getExchange(), 36  
    getInterceptorChain(), 55

## O

org.apache.cxf.Phase, 29  
outFaultInterceptors, 44  
outInterceptors, 44

## P

PhaseInterceptor, 25  
phases  
    definition, 22  
    inbound, 59  
    outbound, 60  
    setting, 29

