

PROGRESS[®] ARTIX[™]

WSDLGen Guide

Version 5.6, May 2011

© 2011 Progress Software Corporation and/or its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

Actional, Apama, Artix, Business Empowerment, DataDirect (and design), DataDirect Connect, DataDirect Connect64, DataDirect Technologies, DataDirect XML Converters, DataDirect XQuery, DataXtend, Dynamic Routing Architecture, EdgeXtend, Empowerment Center, Fathom, Fuse Mediation Router, Fuse Message Broker, Fuse Services Framework, IntelliStream, IONA, Making Software Work Together, Mindreef, ObjectStore, OpenEdge, Orbix, PeerDirect, POSSENET, Powered by Progress, PowerTier, Progress, Progress DataXtend, Progress Dynamics, Progress Business Empowerment, Progress Empowerment Center, Progress Empowerment Program, Progress OpenEdge, Progress Profiles, Progress Results, Progress Software Developers Network, Progress Sonic, ProVision, PS Select, Savvion, SequeLink, Shadow, SOAPscope, SOAPStation, Sonic, Sonic ESB, SonicMQ, Sonic Orchestration Server, SpeedScript, Stylus Studio, Technical Empowerment, Web-Speed, Xcalia (and design), and Your Software, Our Technology—Experience the Connection are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries. AccelEvent, Apama Dashboard Studio, Apama Event Manager, Apama Event Modeler, Apama Event Store, Apama Risk Firewall, AppsAlive, AppServer, ASPen, ASP-in-a-Box, BusinessEdge, Business Making Progress, Cache-Forward, CloudEdge, DataDirect Spy, DataDirect SupportLink, Fuse, FuseSource, Future Proof, GVAC, High Performance Integration, ObjectStore Inspector, ObjectStore Performance Expert, OpenAccess, Orbacus, Pantero, POSSE, ProDataSet, Progress Arcade, Progress CloudEdge, Progress Control Tower, Progress ESP Event Manager, Progress ESP Event Modeler, Progress Event Engine, Progress RFID, Progress RPM, Progress Software Business Making Progress, PSE Pro, SectorAlliance, SeeThinkAct, Shadow z/Services, Shadow z/Direct, Shadow z/Events, Shadow z/Presentation, Shadow Studio, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Sonic Business Integration Suite, Sonic Process Manager, Sonic Collaboration Server, Sonic Continuous Availability Architecture, Sonic Database Service, Sonic Workbench, Sonic XML Server, The Brains Behind BAM, WebClient, and Who Makes Progress are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Third Party Acknowledgments — See the Third Party Acknowledgments section on page 8.

Updated: August 12, 2011

Contents

List of Figures	5
Preface	7
Chapter 1 Using WSDLGen	11
WSDLGen Architecture	12
Generating Code with the wsdlgen Utility	14
JAX-WS Templates	18
WSDLGen Configuration File	19
Unsupported XML Schema Types	22
Chapter 2 Developing Basic Templates	23
Writing Custom Templates	24
Bilingual Files	26
Predefined Objects	31
Generating JAX-WS Java Code	37
Chapter 3 Parsing WSDL and XML	45
Parser Overview	46
Basic Parsing	48
The WSDL and XML Schema Models	49
Parsing Document/Literal Wrapped Style	51
Parsing RPC/Literal Style	53
The JWSDL Parser	55
Overview of the WSDL Model	56
JWSDL Parser Classes	58
The XMLBeans Parser	63
Overview of the XMLBeans Parser	64
XMLBeans Parser Classes	65
Appendix A Java Utility Classes	73
Useful Java Utility Classes	74

Index

77

List of Figures

Figure 1: WSDLGen Code Generator Architecture	12
Figure 2: JWSDL Classes for Parsing a Port Type	56
Figure 3: Navigating the JWSDL Node Hierarchy	57

LIST OF FIGURES

Preface

What is Covered in This Book

This book describes how to use the WSDLGen command-line utility to generate code from a WSDL contract. As well as describing the standard WSDLGen code generating templates, the book explains how to develop custom templates, which you can then use to generate Artix applications implemented in Java.

Who Should Read This Book

This book is aimed primarily at Java developers who are interested in using code generation to accelerate the process of implementing Web service applications.

This book might also be of some interest to build engineers who need to generate Makefiles and Ant build files based on the content of WSDL contracts.

The Artix Documentation Library

For information on the entire Artix Documentation Library, including organization, contents, conventions, and reading paths, see [Using the Artix Library](#).

See the entire documentation set, at the [Artix Product Documentation Web Site](#).

Third Party Acknowledgements

Progress Artix ESB v5.6 incorporates Apache Commons Codec v1.2 from The Apache Software Foundation. Such technology is subject to the following terms and conditions: The Apache Software License, Version 1.1 - Copyright (c) 2001-2003 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. The end-user documentation included with the redistribution, if any, must include the following acknowledgement: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>)." Alternately, this acknowledgement may appear in the software itself, if and wherever such third-party acknowledgements normally appear. 4. The names "Apache", "The Jakarta Project", "Commons", and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact apache@apache.org. 5. Products derived from this software may not be called "Apache", "Apache" nor may "Apache" appear in their name without prior written permission of the Apache Software Foundation. THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation. For more information on the Apache Software Foundation, please see <<http://www.apache.org/>>.

Progress Artix ESB v5.6 incorporates Jcraft JSCH v0.1.44 from Jcraft. Such technology is subject to the following terms and conditions: Copyright (c) 2002-2010 Atsuhiko Yamanaka, JCraft, Inc. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. The names of the authors may not be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL JCRAFT, INC. OR ANY CONTRIBUTORS TO THIS SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

PREFACE

Using WSDLGen

This chapter explains how to use the standard templates provided with WSDLGen to generate sample applications in Java.

In this chapter

This chapter discusses the following topics:


WSDLGen Architecture	page 12
Generating Code with the wsdlgen Utility	page 14
JAX-WS Templates	page 18
WSDLGen Configuration File	page 19
Unsupported XML Schema Types	page 22

WSDLGen Architecture

Overview

Figure 1 provides an overview of the WSDLGen code generator architecture.

Figure 1: WSDLGen Code Generator Architecture

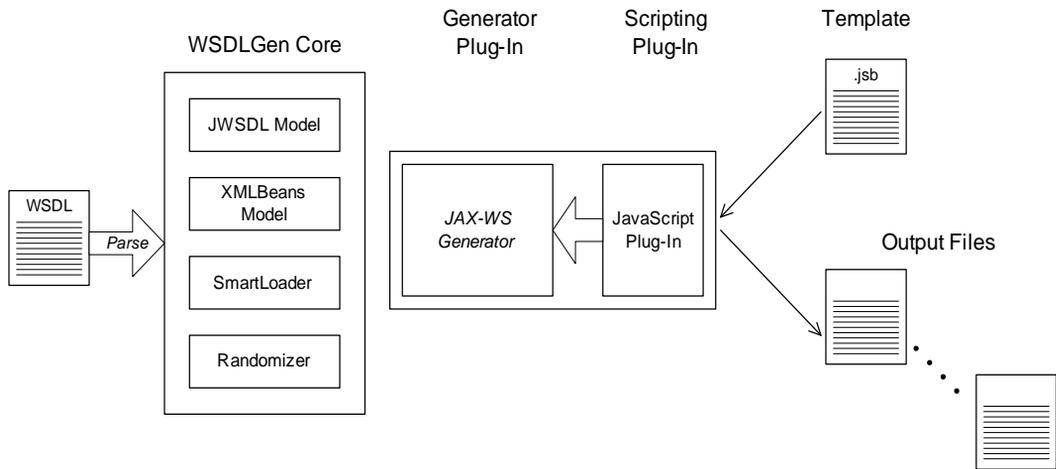

WSDLGen core

The WSDLGen core consists of a pluggable framework—for loading generator and scripting plug-ins—as well as providing a core set of libraries, which are made available to the loaded plug-ins.

The core set of libraries includes the following object models, which can represent the parsed contents of the WSDL contract, as follows:

- *JWSDL model*—a model that recognizes the standard elements of a WSDL contract, identifying each type of WSDL element with a Java class.
- *XMLBeans model*—a model that recognizes the elements of an XML schema definition. This model is used to represent the `types` section of a WSDL contract (where the parameter data types are defined).

For more details about the core parsers, see “[Parser Overview](#)” on page 46.

The WSDLGen core also includes additional utilities, as follows:

- *SmartLoad utility*—provides the capability to load template files from a well-known location (a search path for SmartLoad can be specified in the WSDLGen configuration file).
- *Randomizer utility*—can be used to generate random parameter data. This is useful for generating sample application code.

Generator plug-ins

Because the WSDLGen core provides only the abstract framework for code generation, it is always necessary to specify a particular generator plug-in when you invoke WSDLGen. Currently, the [JAX-WS generator plug-in](#) is provided.

JAX-WS generator plug-in

You must specify the JAX-WS generator in order to generate code for an Artix JAX-WS Java application.

Scripting plug-ins

The WSDLGen architecture has been designed so that it is possible to support additional template languages by adding a plug-in to the core. Currently, WSDLGen supports only the JavaScript language.

JavaScript plug-in

JavaScript (also known as [ECMAScript](#)) is an object-based scripting language that has a syntax similar to C or Java. Unlike object-oriented languages, however, JavaScript is not a strongly-typed language.

The JavaScript plug-in enables you to write code-generating templates in the JavaScript language. The choice of JavaScript as the template language has no impact on the choice of generated language: you can use JavaScript templates to generate code in Java, or any other language.

Standard templates

WSDLGen provides a standard suite of templates that take a WSDL contract and generate a sample *Artix application* in Java based on the interfaces defined in the contract.

Custom templates

It is also possible for you to develop your own custom templates. An easy way to get started with developing custom templates is to take one of the standard WSDLGen templates and modify it for your own requirements—see [“Developing Basic Templates” on page 23](#) for details.

Generating Code with the `wsdngen` Utility

Syntax of `wsdngen`

The `wsdngen` command-line utility has the following syntax:

```
wsdngen [-G ApplicationType] [-T TemplateID] *  
        [-C ConfigFile] [-D Name=Value] * WSDLFile
```

Where a pair of square brackets, `[]`, denotes an optional part of the syntax and the asterisk character, `*`, implies that the preceding option can be repeated 0 or more times.

You must specify the location of a valid WSDL contract file, *WSDLFile*. You can also supply the following options:

- `-G ApplicationType` Specifies the type of application to generate. `jaxws` for generating JAX-WS Java code, is defined by default.
- `-T TemplateID` Each application type defines a set of template IDs, which can be used as shortcuts to invoke particular template scripts. For details, see [“Generating JAX-WS code” on page 17](#).
- `-C ConfigFile` Specifies the location of the WSDLGen configuration file, *ConfigFile*. If this option is not set, `wsdngen` reads the default configuration file (located in `%IT_WSDLGEN_CFG_FILE%` on Windows and `$IT_WSDLGEN_CFG_FILE` on UNIX).
- `-D Name=Value` Specifies the value, *Value*, of a JavaScript property, *Name*. See also [“Variables defined at the command line” on page 16](#).

Alternative syntax of wsdlgen

Alternatively, you can use the following syntax:

```
wsdlgen [-G GeneratorClass] [-T TemplateFile]*  
        [-C ConfigFile] [-D Name=Value]* WSDLFile
```

In this syntax, the following options are used differently:

- G *GeneratorClass* Specifies the name of a generator plug-in class. Use `com.iona.cxf.tools.wsdlgen.jaxwsgenerator.JaxwsGenerator` to generate JAX-WS Java code.
- T *TemplateFile* Specifies the location of a bilingual template file, *TemplateFile*, that governs code generation. This option can be repeated, in order to generate code from multiple templates in one invocation.

Generating code from a specific template (or templates)

You can specify explicitly which templates to run, by invoking the `wsdlgen` utility with the `-T` option. For example, suppose you have a WSDL contract file, `hello_world.wsdl`, and you wish to generate a sample implementation of the Greeter port type. You could invoke the `wsdlgen` utility as follows:

```
wsdlgen  
-G com.iona.cxf.tools.wsdlgen.jaxwsgenerator.JaxwsGenerator  
-D portType=Greeter  
-T templates\jaxw\ArtixJaxwsServer.jsb  
hello_world.wsdl
```

Variables defined at the command line

The following JavaScript variables can be set at the command line, using the `-D` option of the `wsdlgen` command:

- `portType`—local name of the port type for which code is generated.
- `bindingName`—local name of the binding for which code is generated.
- `serviceName`—local name of the service for which code is generated.
- `portName`—name of the port for which code is generated.
- `artixInstall`—when generating an Ant build file using the `ArtixJaxwsAntfile.jsb` template (for example, by running `wsdlgen -G jaxws -T ant`), specifies the root directory of the Java runtime. The Ant build file then picks up its Jar libraries from the `lib` subdirectory of the specified directory. The default value is `ArtixInstallDir/java`.

In particular, you can set the following combinations of these variables at the command line in order to select a particular service and port:

- `serviceName` and `portName`—generate code for the specified service and port.
- `serviceName`—generate code for the specified service and the first port of that service.
- `portType`—generate code for the first service, port, and binding associated with the specified port type.
- `bindingName`—generate code for the first service and port associated with the specified binding.
- *None specified*—generate code for the first service and port in the WSDL contract.

Generating JAX-WS code

When generating JAX-WS code from the standard templates, it is usually simpler to use the `-G jaxws -T TemplateID` syntax. For example, to generate a sample implementation of the `Greeter` port type from the `hello_world.wsdl` file, you could invoke the `wsdlgen` utility as follows:

```
wsdlgen
-G jaxws -D portType=Greeter -T impl hello_world.wsdl
```

When called with `-G jaxws`, the `-T TemplateID` switch supports the following template IDs:

<code>impl</code>	For the given <i>PortType</i> port type (specified by the <code>portType</code> property), generate the files <code>PortType.java</code> and <code>PortTypeImpl.java</code> . Also, generate stub code for the port type.
<code>server</code>	For the given <i>PortType</i> , generate a file, <code>PortTypeServerSample.java</code> , that implements the <code>main()</code> function for a standalone server. Also, generate stub code for the port type.
<code>client</code>	For the given <i>PortType</i> , generate a file, <code>PortTypeClientSample.java</code> , that invokes all of the operations in the <i>PortType</i> port type. Also, generate stub code for the port type.
<code>all</code>	Specifying <code>-T all</code> is equivalent to specifying <code>-T impl -T server -T client</code> .
<code>ant</code>	Generate an Apache Ant build file for the Java application. You can customize the location of the Java runtime by setting the <code>cxfInstall</code> variable—see “Variables defined at the command line” on page 16.

JAX-WS Templates

Overview

WSDLGen provides a standard set of templates for generating JAX-WS code. These templates are located in the `ArtixInstallDir/tools/templates` directory.

Invoking the JAX-WS templates

To invoke a JAX-WS template directly, use the `-G` option to load the `JaxwsGenerator` generator class. For example, to generate code from a single JAX-WS template, `TemplateFile`, enter a command like the following:

```
wsdlgen
  -G com.ionacxf.tools.wsdlgen.jaxwsgenerator.JaxwsGenerator
  -T TemplateFile
  WSDLFile
```

JAX-WS templates

[Table 1](#) lists the WSDLGen templates that can be used to generate JAX-WS Java examples.

Table 1: *WSDLGen Templates for Generating JAX-WS Code*

Java Template File	Description
<code>ArtixJaxwsClient.jsb</code>	Generate a sample Java client.
<code>ArtixJaxwsServer.jsb</code>	Generate a server <code>main()</code> function (for deploying the server in standalone mode).
<code>ArtixJaxwsImpl.jsb</code>	Generate an outline implementation for the port type specified by the <code>portType</code> property.
<code>ArtixJaxwsStubTypes.jsb</code>	Generate stub code and type files for port type specified by the <code>portType</code> property.
<code>ArtixJaxwsAntfile.jsb</code>	Generate a sample <code>build.xml</code> file, for use with the Apache Ant build utility.

WSDLGen Configuration File

Overview

The `wSDLgen` utility has its own configuration file, which is defined in XML format. This configuration file enables you to customize WSDLGen by:

- [Setting JavaScript variables.](#)
- [Setting SmartLoader paths.](#)
- [Defining generator profiles.](#)

Default location

The WSDLGen configuration is stored at the following default location:

```
ArtixInstallDir/tools/etc/wSDLgen.cfg
```

Setting JavaScript variables

You can initialize JavaScript variables from the WSDLGen configuration file, as shown in [Example 1](#).

Example 1: *Setting JavaScript Variables in the Configuration File*

```
<?xml version="1.0" encoding="UTF-8"?>
<wSDLgen>
  <defines>
    <foo>fooValue</foo>
    <!-- ... -->
  </defines>
  ...
</wSDLgen>
```

Where the `defines` element can contain any number of entries of the form `<VariableName>Value</VariableName>`. Each configuration entry of this form is equivalent to including the following JavaScript code at the top of your template:

```
var VariableName = "Value";
```

Setting SmartLoader paths

You can define a search path for the smart loader utility in the WSDLGen configuration file by adding a sequence of path elements inside an enclosing paths element, as shown in [Example 2](#).

Example 2: Setting SmartLoader Paths in the Configuration File

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdlgen>
  <paths>
    <path>/home/fflintstone/.wsdlgen</path>
    <path>/usr/local/templates/wsdlgen</path>
    <!-- ... -->
  </paths>
  ...
</wsdlgen>
```

When searching for scripts included through the smart loader mechanism, WSDLGen searches the directories listed in the paths element. For more details about the smart loader utility, see [“smartLoader utility” on page 36](#).

Defining generator profiles

You can define your own *generator profiles* in the WSDLGen configuration file. A generator profile enables you to customize the combination of templates that are invoked when you enter a WSDLGen command of the form `wsdlgen -G ApplicationType -T TemplateID`. This is typically useful, if you are developing your own WSDLGen templates.

[Example 3](#) shows the general outline of a generator profile in the WSDLGen configuration file.

Example 3: Defining a Generator Profile in the Configuration File

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdlgen>
  ...
  <profiles>
    <ApplicationType>
      <generator>GeneratorClass</generator>
      <TemplateID>
        <template>TemplatePath</template>
        ...
      </TemplateID>
      ...
    </ApplicationType>
```

Example 3: *Defining a Generator Profile in the Configuration File*

```

    </profiles>
    ...
</wsdlgen>

```

The preceding profile configuration can be explained as follows:

1. The `profiles` element contains one or more arbitrarily-named profile elements, `ApplicationType`.
2. An `ApplicationType` element represents a single generator profile. You can call this element anything you like: the `wsdlgen` utility automatically searches for the `ApplicationType` element when you specify it using the `-G ApplicationType` option.
3. The `generator` element specifies the name of the generator plug-in class to use for this profile. For details of the generator classes currently provided by WSDLGen, see [“Alternative syntax of `wsdlgen`” on page 15](#).
4. A `TemplateID` identifies a combination of templates that can be called in a single batch. This element can have an arbitrary name: the `wsdlgen` utility automatically searches for the `TemplateID` element when you specify it using the `-T TemplateID` option.

You can define multiple `TemplateID` elements within each profile.

5. Within each template combination, use the `template` element to specify the location of a single template. Typically, you would specify the absolute pathname of the template. You can also substitute environment variables from the operating system, using the syntax, `$VARIABLE_NAME$`.

Examples of generator profiles

For some examples of generator profiles, see the profiles for `cxx`, `jaxrpc`, and `jaxws` in the default configuration file, `ArtixInstallDir/tools/etc/wsdlgen.cfg`.

Unsupported XML Schema Types

Overview

Currently, not all XML schema types are supported by the WSDLGen code generator. The following XML schema types are currently not supported by the JAX-WS code generator:

- Primitive types: `xs:nonPositiveInteger`, `xs:duration`, `xs:NMTokens`, `xs:IDREF`, `xs:IDREFS`, `xs:ENTITY`, `xs:ENTITIES`, `xs:NOTATION`.
- `xs:list`
- `xs:union`
- `xs:group`
- Types derived by extension or restriction.
- Occurrence constraints on `xs:sequence` and `xs:choice`.
- Anonymous types.

Developing Basic Templates

This chapter provides an introduction to the subject of writing your own templates for generating code in Java.

In this chapter

This chapter discusses the following topics:

Writing Custom Templates	page 24
Bilingual Files	page 26
Predefined Objects	page 31
Generating JAX-WS Java Code	page 37

Writing Custom Templates

Overview

The simplest approach to take when writing a custom template is to take one of the WSDLGen samples and modify it to your own requirements. This chapter aims to provide you with enough information to understand the sample templates and to use the WSDLGen programming interfaces effectively.

Running a custom template

To generate code using a custom template, specify the template file to the `wsdngen` utility using the `-T` command-line option and specify the relevant generator class using the `-G` command-line option.

For full details of the relevant `wsdngen` command-line syntax, see [“Alternative syntax of wsdngen” on page 15](#).

Bilingual files

WSDLGen templates are written in a special file format known as a *bilingual file* and identified by the `.jsb` file suffix. The bilingual file format enables you to freely mix the JavaScript language and the target language together in the one file. For details, see [“Bilingual Files” on page 26](#).

Predefined objects

To provide you with convenient access to data and objects derived from the WSDL contract, WSDLGen creates predefined objects in JavaScript. For example, the `wsdModel` object provides access to a complete parse tree of the WSDL contract (using the JWSDL API).

For details, see [“Predefined Objects” on page 31](#).

Built-in APIs

APIs provided for writing templates include the following:

- *WSDLGen API for JAX-WS*—utility functions for generating JAX-WS Java code from WSDL.
- *WSDLGen randomizer*—a random data generator, used internally by WSDLGen to generate random parameter values.
- *JWSDL API*—a WSDL parser based on the JWSDL standard. See [“The JWSDL Parser” on page 55](#) for details.
- *XMLBeans API*—an XML schema parser. See [“The XMLBeans Parser” on page 63](#) for details.
- *Java model for JAX-WS*—a Java parser that models the artifacts generated by the JAX-WS WSDL-to-Java mapping.

Bilingual Files

Overview

The basic purpose of a JavaScript template in WSDLGen is to generate code in a *target language* (such as Java). Consequently, if a code generating template was written in pure JavaScript, it would contain a large number of print directives to produce the required target code. In practice, this style of coding quickly leads to templates that are virtually illegible (you might be familiar with this sort of problem in the context of HTML-generating servlet code).

To solve this difficulty, WSDLGen introduces the concept of a *bilingual file* for developing code-generating templates. The basic idea of the bilingual file is that a set of escape sequences enable you to switch back and forth between the generating language and the target language. [Example 4](#) shows a sample outline of such a bilingual file, with one section of the file (enclosed between `***` and `***]`) expressed in the target language.

Example 4: *Sample Outline of a Bilingual File.*

```
// JavaScript Bilingual File
openOutputFile(PathName)

// Put JavaScript code here...
...

[***
  // Put TargetLanguage code here...
  ...
***]

closeOutputFile()
```

Opening and closing the output file

A bilingual file must be associated with an output destination. You can specify an output file for the generated code by calling the following function in your script (typically, at the start of the template):

```
openOutputFile (PathName)
```

Where *PathName* specifies the path to the generated output file. On UNIX platforms, an alternative form of the `openOutputFile()` function is available, which lets you set file permissions on the output file:

```
openOutputFile (PathName, Permissions)
```

Where *Permissions* is a string value formatted in the same way as a standard `chmod` permission string. For example, the string, `u=rwx,g=rx,o=x`, would give full permissions to the owner, read and execute permissions to the group, and execute permission to all others. For full details of the permission string syntax, enter `man chmod` at the command line.

You can close the output file by calling the following function (typically, at the end of the template):

```
closeOutputFile()
```

The call to `openOutputFile()` establishes an association between the destination file, *PathName*, and the blocks of generated code written in the target language. All of the generated code is sent to the file, *PathName*, specified by the `openOutputFile()` function.

Note: If `openOutputFile()` is not called, the output is directed to standard out by default.

Output text delimiters

Blocks of generated code are delimited by the output text delimiters shown in [Table 2](#)

Table 2: *Character Sequences for Delimiting Output Text*

Character Sequence	Description
[***	Beginning of a code block written in the target language.

Table 2: *Character Sequences for Delimiting Output Text*

Character Sequence	Description
***]	End of the code block written in the target language.

Escaping within output text

Within the scope of the output text delimiters, you can escape back to JavaScript using the escape characters shown in [Table 3](#).

Table 3: *Escape Characters Used in Output Text*

Escape Sequence	Description
<code>\$VarName\$</code>	Substitute a JavaScript variable, <code>VarName</code> , embedding it in a line of output text—see “ Variable escape ” on page 29 .
<code>@JavaScript</code>	Escape to a line of JavaScript—see “ Line escape ” on page 30 .

Variable escape

Within the scope of the output text delimiters, you can substitute the value of a JavaScript variable using the dollar sign, \$, as an escape character. To make the substitution, enclose the JavaScript variable name between two dollar signs, `$VarName$`.

For example, if `intfName` is a JavaScript variable that holds a WSDL port type name, you could declare a Java class to implement this port type using the following fragment of bilingual file.

```
// JavaScript Bilingual File
openOutputFile(PathName)

[***
public class $intfName$Impl implements java.rmi.Remote {
***]

// More script (not shown)...
...
closeOutputFile()
```

The implementation class name is derived by adding the `Impl` suffix to the porty type name. For example, if generating code for the `Greeter` port type, `$intfName$Impl` would expand to `GreeterImpl`.

Line escape

Within the scope of the output text delimiters, you can escape to a line of JavaScript code by putting the *at* symbol, @, at the start of a line (as the first non-whitespace character).

For example, the following bilingual file generates a Java function, `ListInterfaceOps()`, that lists all of the operations in the current WSDL interface.

```
// JavaScript Bilingual File
...
openOutputFile (PathName)

[***
  ...
  public static void ListInterfaceOps() {
    System.out.println("Operation is one of: ");
    @for (var i = 0; i < numOps; i++) {
      System.out.println("  $operations[i].getName()$");
      @}
    }
  }
  ***]

closeOutputFile()
```

Unlike the variable escape mechanism, `$VarName$`, the line escape does *not* produce any output text as a side effect of its execution. While the line enclosing a variable escape sequence, `$VarName$`, is implicitly enclosed in a print statement, the line escaped by the *at* symbol, @, is not printed.

Escaping the escape characters

Occasionally, you might need to output the dollar, \$, and at sign, @, character literals inside the scope of an output text block. For this purpose, WSDLGen defines the `$dollar$` and `at` variables, which resolve to literal dollar, \$, and literal *at*, @, inside an output text block.

Predefined Objects

Overview

The programming interface provided by WSDLGen includes a number of predefined JavaScript objects. Some of these predefined objects are simple variables (for example, `intfName`, containing the name of the current port type), whilst others provide access to particular APIs (for example, `wsdlModel`, which provides access to the JWSDL parser API).

List of predefined objects

Table 4 shows the list of JavaScript objects predefined by WSDLGen.

Table 4: *Predefined JavaScript Objects*

JavaScript Object	Description
<code>bindingName</code>	Local part of the binding name for which code is generated. You can set this variable when you invoke the <code>wsdlgen</code> command (see “Variables defined at the command line” on page 16).
<code>intfName</code>	A name derived from the port type name, <code>portType</code> , by dropping the <code>PortType</code> suffix (if any).
<code>javaIntfName</code>	A name derived from <code>intfName</code> by removing any dot characters, <code>.</code> , or hyphen characters, <code>-</code> , and capitalizing the subsequent letter. For example, <code>simple.simpleIntf</code> would become <code>SimpleSimpleIntf</code> .
<code>javaModel</code>	An instance of the <code>org.apache.cxf.tools.common.model.JavaModel</code> type, which provides access to a Java parser.
<code>javaPackage</code>	The Java package name in which to define the generated implementation classes. Its value is derived from the WSDL target namespace.

Table 4: *Predefined JavaScript Objects (Continued)*

JavaScript Object	Description
<code>javaServiceName</code>	A name derived from <code>serviceName</code> by removing any dot characters, <code>.</code> , or hyphen characters, <code>-</code> , and capitalizing the subsequent letter. For example, <code>simple.simpleService</code> would become <code>SimpleSimpleService</code> .
<code>jaxwsIntfName</code>	A name derived from <code>intfName</code> by removing any dot characters, <code>.</code> , hyphen characters, <code>-</code> , or underscore characters, <code>_</code> , and capitalizing the subsequent letter. For example, <code>simple.simpleIntf</code> would become <code>SimpleSimpleIntf</code> .
<code>jaxwsServiceName</code>	A name derived from <code>serviceName</code> by removing any dot characters, <code>.</code> , hyphen characters, <code>-</code> , or underscore characters, <code>_</code> , and capitalizing the subsequent letter. For example, <code>simple.simpleService</code> would become <code>SimpleSimpleService</code> .
<code>jsModel</code>	A wrapper for the <code>wsdlModel</code> object.
<code>operations []</code>	An array of operation objects, of <code>javax.wsdl.Operation</code> type. See “JWSDL Parser Classes” on page 58 for details.
<code>parametersList</code>	An instance of the utility class, <code>com.ionawebsoft.wsdlgen.common.ParametersList</code> . This object enables you to obtain a list of parts and faults for every WSDL operation.
<code>portName</code>	Port name for which code is generated. You can set this variable when you invoke the <code>wsdlgen</code> command (see “Variables defined at the command line” on page 16).
<code>portType</code>	Local part of the port type name for which code is generated. You can set this variable when you invoke the <code>wsdlgen</code> command (see “Variables defined at the command line” on page 16).

Table 4: *Predefined JavaScript Objects (Continued)*

JavaScript Object	Description
randomizer	An instance of a WSDLGen utility that generates random numbers. The WSDLGen templates use this object to generate random parameters.
schemaModel	An instance of the <code>org.apache.xmlbeans.SchemaTypeLoader</code> class, which provides access to an XML schema parser. See “The XMLBeans Parser” on page 63 for details.
serviceName	Local part of the service name for which code is generated. You can set this variable when you invoke the <code>wsdlgen</code> command (see “Variables defined at the command line” on page 16).
smartLoader	An instance of a WSDLGen utility that imports JavaScript or bilingual files from a well-known location. The search path for the smart loader can be specified in the WSDLGen configuration file.
tns	The namespace of the port type, binding, and service elements. Specifically, this variable contains the value of the <code>targetNamespace</code> attribute from the <code>definitions</code> element in the WSDL contract.
wsdlFile	The location of the WSDL contract file.
wsdlModel	An instance of the <code>javax.wsdl.Definition</code> class, which provides access to a JWSDL parser. See “Parsing WSDL and XML” on page 45 for details.

WSDL and schema models

The following objects represent the roots of the WSDL model and the XML schema model respectively:

- `wSDLModel`
- `schemaModel`

These parser objects provide a complete model of the WSDL elements and XML schema types defined in the WSDL contract.

The following object represents the root of the JAX-WS Java model:

- `javaModel`

This parser object provides a model of all the Java artifacts produced by the JAX-WS WSDL-to-Java mapping.

Typically, it is not necessary to use these APIs in a basic template. For more advanced applications, however, see [“Parsing WSDL and XML” on page 45](#) for details about the parser APIs.

operations[] array

An array of operation objects representing all of the operations in the `portType` port type. The operation objects are instances of `javax.wsdl.Operation`, which is part of the JWSDL API.

For example, you can print out the names of all the operations in the `portType` port type as follows:

```
// JavaScript Bilingual File
...
for (var i=0; i < operations.length; i++) {
  [***
    System.out.println("Operation["+i+"] name = "
      + $operations[i].getName()$
    );
  ***]
}
```

For more details about the `javax.wsdl.Operation` class, see [“JWSDL Parser Classes” on page 58](#).

parametersList object

The `parametersList` object provides a method, `getPartsAndFaults()`, that provides access to all of the message parts and faults associated with a particular WSDL operation.

For example, to obtain the parts and faults associated with the *i*th operation of the current WSDL interface, make the following JavaScript call:

```
var partsAndFaults = parametersList.getPartsAndFaults(  
    portType + operations[i].getName()  
)
```

Where the argument to `getPartsAndFaults()` is a key, consisting of a port type name concatenated with an operation name.

By calling `partsAndFaults.parts()[k]`—where *k* lies in the range 0 to `partsAndFaults.parts().length`—you can obtain a `PartHolder` object, which holds the following items:

- `partsAndFaults.parts()[k].getPart()`—returns the `javax.wsdl.Part` object that represents the current part.
- `partsAndFaults.parts()[k].getDirection()`—returns one of the following direction flag values: `DIRECTION_IN`, or `DIRECTION_OUT`.

By calling `partsAndFaults.faults()[k]`—where *k* lies in the range 0 to `partsAndFaults.faults().length`—you can obtain a `FaultHolder` object, which holds the following items:

- `partsAndFaults.faults()[k].getName()`—returns the fault name.
- `partsAndFaults.faults()[k].getParts()`—returns the array of `javax.wsdl.Part` objects contained in the fault.

smartLoader utility

The *smart loader utility* provides a way of including files located relative to a well-known directory (or directories). For example, if you are implementing a custom template, you could include the contents of the file, `CustomUtils/MyUtilities.js`, at the start of your template by calling `smartLoad()` as follows:

```
# JavaScript Bilingual File
smartLoad("CustomUtils/MyUtilities.js");
...
```

Where the included file, `CustomUtils/MyUtilities.js`, is located under one of the directories listed in the `paths` element in the WSDLGen configuration file.

[Example 5](#) shows an example of a configuration file that specifies two path directories, with each directory enclosed in a `path` element. The directories are searched in the order in which they appear in the configuration file.

Example 5: *Smart Loader Path in the WSDLGen Configuration File*

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdlgen>
  <paths>
    <path>/home/fflintstone/.wsdlgen</path>
    <path>/usr/local/templates/wsdlgen</path>
    <!-- ... -->
  </paths>
  ...
</wsdlgen>
```

Generating JAX-WS Java Code

Overview

This section provides a brief overview of the most important WSDLGen functions for generating JAX-WS Java code. The following topics are described:

- [Indentation level.](#)
 - [Mangling identifiers.](#)
 - [Generating print calls.](#)
 - [Generating operation calls in a JAX-WS consumer.](#)
 - [Catching fault exceptions in a JAX-WS consumer.](#)
 - [Generating a JAX-WS service implementation.](#)
-

Indentation level

Some of the functions in the WSDLGen API generate multi-line output. To give you some control over the layout of the resulting output, these functions take an integer parameter, *IndentLevel*, that lets you specify the initial level of indentation.

Mangling identifiers

Table 5 summarizes the functions that you can use to mangle identifiers according to the JAX-WS mangling rules.

Table 5: *Functions for Mangling JAX-WS Identifiers*

Function	Description
<code>jaxwsMangleMethodName (methodName)</code>	Return a mangled method name, according to the following rule: remove each occurrence of <code>_</code> or <code>-</code> and capitalize the following character. For example, <code>foo_bar</code> becomes <code>FooBar</code> and <code>foo-bar</code> becomes <code>FooBar</code> .
<code>jaxwsMangleTypeName (typeName)</code>	Return a mangled type name, according to the following rule: remove each occurrence of <code>.</code> , <code>_</code> , or <code>-</code> and capitalize the following character. For example, <code>my_type</code> becomes <code>MyType</code> and <code>iona.my-type</code> becomes <code>IonaMyType</code> .
<code>jaxwsMangleURI (name)</code>	Remove the trailing file extension from a URI. For example, <code>http://www.iona.com/foo.xml</code> becomes <code>http://www.iona.com/foo</code> .
<code>jaxwsMangleVarName (varName)</code>	Return a mangled object name or class name, according to the following rule: remove all occurrences of <code>.</code> and <code>-</code> characters.

Generating print calls

[Table 6](#) summarizes the WSDL functions that you use to generate Java methods that print operation parameter values.

Table 6: *Functions for Generating JAX-WS Print Calls*

Function	Description
<pre>jaxwsPrintMethodSig(portType, opName, ignoreDirection)</pre>	<p>Generate the signature of a Java method that prints out the parameters of the operation, <i>opName</i>, in the interface, <i>portType</i>. The <i>ignoreDirection</i> parameter specifies which kind of parameter <i>not</i> to print. The <i>ignoreDirection</i> parameter can have one of the following values: DIRECTION_IN, DIRECTION_OUT, DIRECTION_INOUT.</p>
<pre>jaxwsPrintParts(portType, opName, lvl, isClient)</pre>	<p>Generate the body of a Java method that prints out the parameters of the operation, <i>opName</i>, in the interface, <i>portType</i>. REVISIT - In the templates, the <i>isClient</i> parameter seems to be treated as an <i>ignoreDirection</i> parameter. Which is correct?</p>
<pre>jaxwsPrintCall(portType, opName, ignoreDirection)</pre>	<p>Generate a Java method call that calls the method generated by the preceding utility functions.</p>

For example, to generate a method that prints the *out* and *inout* parameters of the *met* JAX-WS method, use the following code:

```
$jaxwsPrintMethodSig(portType, met.getOperationName(),
  DIRECTION_IN) $ {
  $jaxwsPrintParts(portType, met.getOperationName(), 2,
  DIRECTION_IN) $
}
```

To call the preceding print method, generate a method call as follows:

```
$jaxwsPrintCall(portType, met.getOperationName(), DIRECTION_IN) $
```

Generating operation calls in a JAX-WS consumer

[Table 7](#) summarizes the WSDLGen functions that you use to generate a WSDL operation call using the JAX-WS mapping:

Table 7: *Functions for Generating a JAX-WS Operation Call*

Function	Description
<pre>jaxwsPopulateParts(portType, opName, lvl, isClient)</pre>	When the <i>isClient</i> parameter is equal to <code>true</code> , populate each of the request parameters (<i>in</i> and <i>inout</i> parameters) with random data.
<pre>jaxwsMethodCall(portType, opName, lvl)</pre>	Call the operation, <i>opName</i> .

The functions in [Table 7](#) take the following arguments:

- *portType* is the local name of the port type on which the operation is defined;
- *opName* is the local name of the WSDL operation;
- *lvl* specifies how many levels of indentation are applied to the generated code.
- *ignoreDirection* specifies which kind of parameters to ignore whilst processing. This flag can take either of the values, `DIRECTION_IN` or `DIRECTION_OUT`. For example, if you specify this flag as `DIRECTION_OUT`, only *in* parameters will be processed.

[Example 6](#) shows how to use the preceding functions to generate JAX-WS operation calls in a Web service client. The code iterates over every operation in the current port type, generating code to declare and initialize the parameters and then call the operation.

Example 6: *Generating JAX-WS Operation Calls*

```
@for (var i = 0; i < methods.size(); i++) {
@var met = methods.get(i)
    public static void
    call$initialToUpperCase(met.getName())$(initialToUpperCase(j
axwsIntfName)$ impl) {
        System.out.println("Invoking $met.getName()$.");
        $jaxwsPopulateParts(portType, met.getOperationName(), 3,
true)$
        $jaxwsMethodCall(portType, met.getOperationName(), 3)$
    }
@}
```

Catching fault exceptions in a JAX-WS consumer

To generate a catch exception statement, WSDLGen provides the `getJaxwsCatchExceptionsStatement()` function, whose syntax is summarized in [Table 8](#).

Table 8: *Functions for Generating a JAX-WS Operation Call*

Function	Description
<pre>getJaxwsCatchExceptionsStatement(Method, lvl, ignoreDirection)</pre>	<p>Generate a catch exception statement for <i>Method</i>, where <i>Method</i> is a <i>JavaMethod</i> instance that represents the WSDL operation.</p>

Example 7 shows an example of how to generate Java code to catch the fault exceptions associated with the method, `met`.

Example 7: *Generating JAX-WS Code to Catch a Fault Exception*

```
// JavaScript Bilingual File
...
[***
@var exceptions = met.getExceptions()
@if (exceptions.size()) {
    try {
@}
        // Code to call 'met' (not shown)
        ...
@if (exceptions.size()) {
$getXwsCatchExceptionsStatement(met, 2, DIRECTION_OUT)$
@}
...
***]
```

Generating a JAX-WS service implementation

Table 9 summarizes the WSDLGen functions that you use to generate a JAX-WS implementation class.

Table 9: *Functions for Generating a JAX-WS Implementation Class*

Function	Description
<code>jaxwsMethodSig(met)</code>	Generate a Java method signature for the operation represented by <code>met</code> in the Java model.
<code>jaxwsPopulateParts(portType, opName, lvl, isClient)</code>	When the <code>isClient</code> parameter is equal to <code>false</code> , populate each of the reply parameters (<code>inout</code> and <code>out</code> parameters) with random data.

[Example 8](#) shows a fragment of a script that uses the preceding functions to generate a Java implementation class. The script iterates over all of the operations in the current port type, `portType`, generating an implementing method for each one.

Example 8: *Generating a JAX-WS Implementation Class*

```
// JavaScript Bilingual File
...
[***
@for (var i = 0; i < methods.size(); i++) {
@var met = methods.get(i)
  $jaxwsMethodSig(met)$
    System.out.println("Executing operation $met.getName()$");
  $jaxwsPrintCall(portType, met.getOperationName(),
    DIRECTION_OUT)$

    $jaxwsPopulateParts(portType, met.getOperationName(), 3,
    false)$
@   if (met.getReturn().getType() != "void") {
      return null;
@   }
@ }
@}
***]
```


Parsing WSDL and XML

This chapter introduces you to the subject of parsing WSDL using the low-level APIs, JWSDL and Apache XMLBeans. The higher-level WSDLGen API is built on top of these basic parsing APIs.

In this chapter

This chapter discusses the following topics:

Parser Overview	page 46
Basic Parsing	page 48
The JWSDL Parser	page 55
The XMLBeans Parser	page 63

Parser Overview

Overview

The parsing APIs that underly WSDLGen are taken from the following open source products:

- WSDL4J (reference implementation of the JWSDL standard),
- Apache XMLBeans.

These two parsers provide alternative views of the WSDL contract. The JWSDL model is useful for parsing WSDL artifacts, such as port types, bindings, and services. The XMLBeans model, on the other hand, is an XML schema parser, which is more useful for parsing the XML schema types defined in the WSDL contract.

JWSDL

JWSDL is a Java API for parsing WSDL contracts. This API is being developed under the Java Community Process, JSR 110. A copy of the JWSDL specification and complete Javadoc for the JWSDL API can be downloaded from the following location:

<http://jcp.org/en/jsr/detail?id=110>

Apache XMLBeans

Apache XMLBeans is an open source API for parsing XML schemas. It is useful for parsing the contents of the `schema` elements in a WSDL contract. The home page for the XMLBeans project is:

<http://xmlbeans.apache.org/>

The complete Javadoc for XMLBeans v2.2.0 is available at the following location:

<http://xmlbeans.apache.org/docs/2.2.0/reference/index.html>

Rhino

Rhino is a Java implementation of JavaScript that includes the capability to map Java APIs into JavaScript (the *scripting Java* feature). In the context of WSDLGen, this capability of Rhino is exploited to make both the JWSDL API and the XMLBeans API available in JavaScript (these APIs are originally specified in Java only).

Due to the strong similarity between Java syntax and JavaScript syntax, the mapped APIs are remarkably intuitive to use from within JavaScript. For details about how this mapping works, see:

<http://www.mozilla.org/rhino/ScriptingJava.html>

Basic Parsing

Overview

This section discusses some basic topics in parsing WSDL contracts. In particular, you need to be aware of how the contract style (document/literal wrapped or RPC/literal) affects how you parse a WSDL port type.

In this section

This section contains the following subsections:

The WSDL and XML Schema Models	page 49
Parsing Document/Literal Wrapped Style	page 51
Parsing RPC/Literal Style	page 53

The WSDL and XML Schema Models

Overview

WSDLGen enables JavaScript programs to access the JWSDL API and the XMLBeans API from by defining the following JavaScript objects:

- `wsdlModel`—the root of the JWSDL parser model.
- `schemaModel`—the root of the XMLBeans parser model.

These two objects are pushed into JavaScript using the Rhino Java-to-JavaScript mapping feature.

`wsdlModel` instance

To access the JWSDL API from within JavaScript, use the `wsdlModel` object, which is an instance of the `javax.wsdl.Definition` class mapped to JavaScript.

The JWSDL `Definition` class represents the top level element of the WSDL contract (see “[JWSDL Parser Classes](#)” on page 58). For example, you can use the `wsdlModel` object to obtain a list of all the port types in the contract as follows:

```
// JavaScript
var portTypeMap = wsdlModel.getPortTypes()
var portTypeArr = portTypeMap.values().toArray()

// Iterate over the list of port types
for each (pt in portTypeArr) {
    ... // Do something with the port type, pt.
}
```

schemaModel instance

To access the XMLBeans API from within JavaScript, use the `schemaModel` object, which is an instance of the `org.apache.xmlbeans.SchemaTypeLoader` class mapped to JavaScript.

The XMLBeans `SchemaTypeLoader` class enables you to find the XML schema types and elements defined within the `wsdl:types` element in the WSDL contract (see [“XMLBeans Parser Classes” on page 65](#)). For example, you can use the `schemaModel` object to obtain an element named `{http://xml.iona.com/wsdlgen/demo}testParams`, as follows:

```
// JavaScript

var TARG_NAMESPACE = "http://xml.iona.com/wsdlgen/demo"
var elQName = new javax.xml.namespace.QName(TARG_NAMESPACE,
    "testParams")

var el = schemaModel.findElement(elQName)
```

Parsing Document/Literal Wrapped Style

Overview

This subsection describes how to parse a WSDL contract that is written in *document/literal wrapped* style. The document/literal wrapped style is distinguished by the fact that it uses single part messages. Each part is defined to be a sequence type, whose constituent elements represent operation parameters.

Characteristics of the document/literal wrapped style

A given operation, *OperationName*, must be defined as follows, in order to conform to the document/literal wrapped style of interface:

- *Input message*—the *message* element that represents the operation's input message must obey the following conditions:
 - The message contains just *a single part*.
 - The part references an element (not a type) and the element must be named, *OperationName*.
- *Input element*—the *OperationName* element must be defined as a sequence complex type, where each element in the sequence represents a distinct input parameter.
- *Output message*—the *message* element that represents the operation's output message must obey the following conditions:
 - The message contains just *a single part*.
 - The part references an element (not a type) and the element must be named, *OperationNameResponse*.
- *Output element*—the *OperationNameResponse* element must be defined as a sequence complex type, where each element in the sequence represents a distinct output parameter.

Sample WSDL contract

Example 9 shows an example of a WSDL contract defining an operation, `testParams`, that conforms to document/literal wrapped style.

Example 9: *Operation Defined in Document/Literal Style*

```

<?xml version="1.0" encoding="UTF-8"?>
<definitions ... >
  <wsdl:types>
    <schema targetNamespace="..."
      xmlns="http://www.w3.org/2001/XMLSchema">
      <element name="testParams">
        <complexType>
          <sequence>
            <element name="inInt" type="xsd:int"/>
            <element name="inoutInt" type="xsd:int"/>
          </sequence>
        </complexType>
      </element>
      <element name="testParamsResponse">
        <complexType>
          <sequence>
            <element name="inoutInt" type="xsd:int"/>
            <element name="outFloat" type="xsd:float"/>
          </sequence>
        </complexType>
      </element>
    </schema>
  </wsdl:types>
  <message name="testParams">
    <part name="parameters" element="tns:testParams"/>
  </message>
  <message name="testParamsResponse">
    <part name="parameters"
      element="tns:testParamsResponse"/>
  </message>
  <wsdl:portType name="BasePortType">
    <wsdl:operation name="testParams">
      <wsdl:input message="tns:testParams"
        name="testParams"/>
      <wsdl:output message="tns:testParamsResponse"
        name="testParamsResponse"/>
    </wsdl:operation>
  </wsdl:portType>
  ...
</definitions>

```

Parsing RPC/Literal Style

Overview

This subsection describes how to parse a WSDL contract that is written in *RPC/literal* style. The RPC/literal style is distinguished by the fact that it uses multi-part messages (one part for each parameter).

Characteristics of the RPC/literal style

A given operation, *OperationName*, must be defined as follows, in order to conform to the RPC/literal style of interface:

- *Input message*—the *message* element that represents the operation's input message must obey the following conditions:
 - The message can contain multiple parts, where each part represents a distinct input parameter.
 - Each part references a type (not an element).
- *Output message*—the *message* element that represents the operation's output message must obey the following conditions:
 - The message can contain multiple parts, where each part represents a distinct output parameter.
 - Each part references a type (not an element).

Sample WSDL contract

Example 10 shows an example of a WSDL contract defining an operation, `testParams`, that conforms to RPC/literal style.

Example 10: *Operation Defined in RPC/Literal Style*

```
<definitions ...>
  ...
  <message name="testParams">
    <part name="inInt" type="xsd:int"/>
    <part name="inoutInt" type="xsd:int"/>
  </message>
  <message name="testParamsResponse">
    <part name="inoutInt" type="xsd:int"/>
    <part name="outFloat" type="xsd:float"/>
  </message>
  ...
  <portType name="BasePortType">
    <operation name="testParams">
      <input message="tns:testParams" name="testParams"/>
      <output message="tns:testParamsResponse"
        name="testParamsResponse"/>
    </operation>
  </portType>
  ...
</definitions>
```

The JWSDL Parser

Overview

This section contains a partial summary of the JWSDL parser API. Only the parts of the API that you would need for generating application code are described here. For a complete description of the API, see [JSR 110](#).

In this section

This section contains the following subsections:

Overview of the WSDL Model	page 56
JWSDL Parser Classes	page 58

Overview of the WSDL Model


Overview

This section provides a partial overview of the WSDL model supported by the JWSDL parser. We focus here on the subset of the JWSDL API that is useful for generating application code from a WSDL contract. Hence, the discussion omits the API for parsing `wSDL:binding` and `wSDL:service` elements. The API for parsing the `wSDL:portType` element, which is essential for generating application code, is described here.

JWSDL classes required for parsing a port type

Figure 2 provides an overview of the JWSDL classes required for parsing a WSDL port type, showing how each JWSDL class corresponds to an element of the original WSDL contract.

Figure 2: JWSDL Classes for Parsing a Port Type

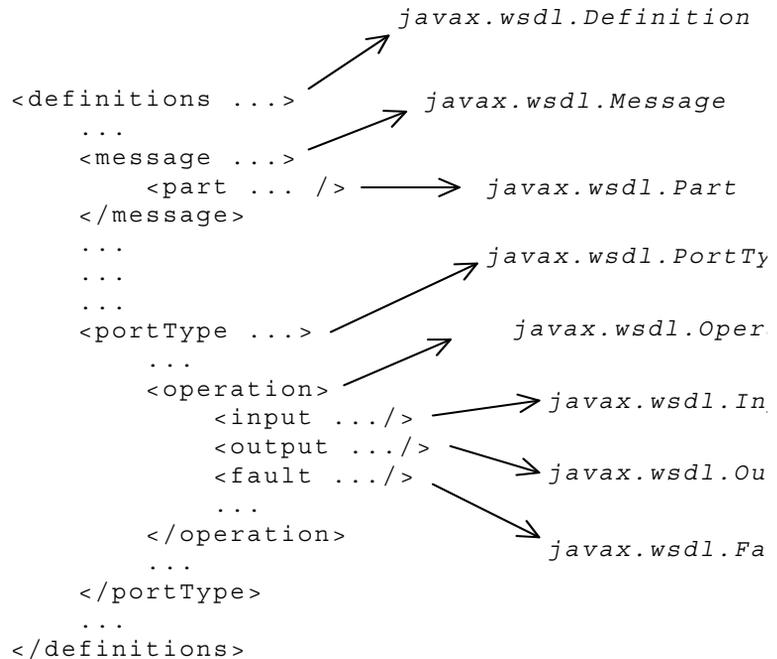


Generally, each JWSDL class is named after the element it represents. Note, however, that the class representing the `definitions` element is called `Definition`, *not* `Definitions`.

Node hierarchy

Each JWSDL class in the nodal hierarchy provides methods to access the WSDL elements it contains or, in some cases, references. [Figure 3](#) shows the most convenient paths you can take to navigate down the node hierarchy when parsing a WSDL port type.

Figure 3: *Navigating the JWSDL Node Hierarchy*

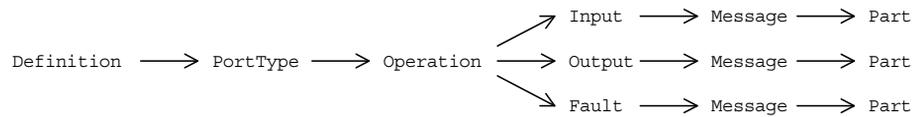

Once you get down as far as a `javax.wsdl.Part` node, you can retrieve the `QName` of the element (or type) that represents a particular operation argument. To progress further with the parsing, you need to switch to the XMLBeans API, which enables you to parse the XML schema encoding the argument data (see [“The XMLBeans Parser”](#) on page 63).

JWSDL Parser Classes

Overview

This subsection summarizes the JWSDL parser classes that are likely to prove most useful when attempting to parse a port type in the context of generating code.

The following JWSDL classes are summarized here:

- [javax.wsdl.Definition](#)
- [javax.wsdl.PortType](#)
- [javax.wsdl.Operation](#)
- [javax.wsdl.Input](#)
- [javax.wsdl.Output](#)
- [javax.wsdl.Fault](#)
- [javax.wsdl.Message](#)
- [javax.wsdl.Part](#)

Useful Java utility classes

A number of Java utility classes are used with the JWSDL parser API (for example, aggregate types such as `java.util.List`). For your convenience, a brief overview of these utility classes is provided in [Appendix A on page 73](#).

For the complete Javadoc API, consult the following Javadoc reference:

<http://java.sun.com/j2se/1.5.0/docs/api>

javax.wsdl.Definition

The `javax.wsdl.Definition` class represents a `wsdl:definition` element (top level of a WSDL contract). The most useful methods from the `javax.wsdl.Definition` class are shown in [Table 10](#).

Table 10: *Methods from the javax.wsdl.Definition Class*

Method Signatures	Description
<code>java.util.Map getPortTypes()</code>	Get the <code>portType</code> elements defined in this definition element.
<code>javax.wsdl.PortType getPortType(javax.xml.namespace.QName name)</code>	Get the <code>portType</code> element with the specified name.
<code>java.util.Map getAllPortTypes()</code>	Get the <code>portType</code> elements defined in this definition element and those in any imported definition elements down the WSDL tree.
<code>java.util.Map getImports()</code>	Get a map of lists containing all the imports defined here.
<code>java.util.Map getImports(String namespaceURI)</code>	Get the list of imports for the specified namespaceURI.
<code>java.util.Map getNamespaces()</code>	Get all namespace associations in this definition.
<code>String getNamespace(String prefix)</code>	Get the namespace URI associated with this prefix.
<code>String getPrefix(String namespaceURI)</code>	Get a prefix associated with this namespace URI.
<code>String getTargetNamespace()</code>	Get the target namespace in which the WSDL elements are defined.

javax.wsdl.PortType

The `javax.wsdl.PortType` class represents a `wsdl:portType` element. The most useful methods from the `javax.wsdl.PortType` class are shown in [Table 11](#).

Table 11: *Methods from the javax.wsdl.PortType Class*

Method Signatures	Description
<code>java.util.List getOperations()</code>	Get the operations defined in this port type.
<code>javax.wsdl.Operation getOperation(String name, String inputName, String outputName)</code>	Get the operation with the specified name, <code>name</code> . If the operation name is overloaded, you can optionally use the <code>inputName</code> (the name of the operation's input element) and/or the <code>outputName</code> (the name of the operation's output element) to disambiguate. Otherwise, set <code>inputName</code> and <code>outputName</code> to null.
<code>javax.xml.namespace.QName getQName()</code>	Returns the name of the port type.
<code>boolean isUndefined()</code>	True if this port type is not defined.

javax.wsdl.Operation

The `javax.wsdl.Operation` class represents a `wsdl:operation` element. The most useful methods from the `javax.wsdl.Operation` class are shown in [Table 12](#).

Table 12: *Methods from the javax.wsdl.Operation Class*

Method Signatures	Description
<code>javax.wsdl.Input getInput()</code>	Get this operation's input element.
<code>javax.wsdl.Output getOutput()</code>	Get this operation's output element.
<code>java.util.Map getFaults()</code>	Get this operation's fault elements.
<code>javax.wsdl.Fault getFault(String name)</code>	Get the fault with the specified name.
<code>String getName()</code>	Returns the name of the operation.
<code>boolean isUndefined()</code>	True if the operation is undefined.

javax.wsdl.Input

The `javax.wsdl.Input` class represents a `wsdl:input` element. The most useful methods from the `javax.wsdl.Input` class are shown in [Table 13](#).

Table 13: *Methods from the javax.wsdl.Input Class*

Method Signatures	Description
<code>javax.wsdl.Message getMessage()</code>	Get the input message element.
<code>String getName()</code>	Return the name of the input element (if any).

javax.wsdl.Output

The `javax.wsdl.Output` class represents a `wsdl:output` element. The most useful methods from the `javax.wsdl.Output` class are shown in [Table 14](#).

Table 14: *Methods from the javax.wsdl.Output Class*

Method Signatures	Description
<code>javax.wsdl.getMessage()</code>	Get the output message element.
<code>String getName()</code>	Return the name of the output element (if any).

javax.wsdl.Fault

The `javax.wsdl.Fault` class represents a `wsdl:fault` element. The most useful methods from the `javax.wsdl.Fault` class are shown in [Table 15](#).

Table 15: *Methods from the javax.wsdl.Fault Class*

Method Signatures	Description
<code>javax.wsdl.Message getMessage()</code>	Get the fault message element.
<code>String getName()</code>	Return the name of the fault element (if any).

javax.wsdl.Message

The `javax.wsdl.Message` class represents a `wsdl:message` element. The most useful methods from the `javax.wsdl.Message` class are shown in [Table 16](#).

Table 16: *Methods from the javax.wsdl.Message Class*

Method Signatures	Description
<code>java.util.Map</code> <code>getParts()</code>	Get a map of the message's parts, where the key is a part name and the value is a <code>javax.wsdl.Part</code> object.
<code>javax.wsdl.Part</code> <code>getPart(String name)</code>	Get the part specified by name.
<code>javax.xml.namespace.QName</code> <code>getQName()</code>	Get the qualified name of this message element.
<code>boolean</code> <code>isUndefined()</code>	True if this message element is undefined.

javax.wsdl.Part

The `javax.wsdl.Part` class represents a `wsdl:part` element. The most useful methods from the `javax.wsdl.Part` class are shown in [Table 17](#).

Table 17: *Methods from the javax.wsdl.Part Class*

Method Signatures	Description
<code>javax.xml.namespace.QName</code> <code>getElementName()</code>	Get the element node referred to by the part's <code>element</code> attribute (if any).
<code>javax.xml.namespace.QName</code> <code>getTypeName()</code>	Get the type node referred to by the part's <code>type</code> attribute (if any).
<code>String</code> <code>getName()</code>	Get the name of the part.

The XMLBeans Parser

Overview

This section contains a partial summary of the XMLBeans parser API, which can be used to parse the parameter data from WSDL operations at runtime. For a complete description of the API, see the [XMLBeans 2.2.0 Javadoc](#).

In this section

This section contains the following subsections:

Overview of the XMLBeans Parser	page 64
XMLBeans Parser Classes	page 65

Overview of the XMLBeans Parser

Overview

This section provides a partial overview of the classes in the XMLBeans parser. The XMLBeans parser actually supports two different kinds of schema model: a static model and a dynamic (runtime) model. The static model is created by generating a set of Java classes that represent the elements of an XML schema. The dynamic model, on the other hand, does not require any Java classes to be generated and can parse any XML schema at runtime.

The section focusses on describing the dynamic (runtime) model.

XMLBeans classes needed to parse XML schema

The following XMLBeans classes are essential for the runtime parsing of XML data:

- `org.apache.xmlbeans.SchemaTypeLoader`—a class that enables you to look up schema types and schema global elements by name.
- `org.apache.xmlbeans.SchemaGlobalElement`—a class that represents elements defined *directly* inside the `xsd:schema` element (in contrast to elements defined at a nested level in the schema, which are known as *local elements*).

Note: The main difference between a global element and a local element is that a global element can be defined to be a member of a substitution group, whereas a local element cannot. In addition, the elements referenced within a `wsdl:part` element would normally be global elements.

- `org.apache.xmlbeans.SchemaType`—the class that represents a schema type.
- `org.apache.xmlbeans.SchemaProperty`—a class that represents a summary of the elements that *share the same name* within a complex type definition.

Note: XML schema allows you to define an element with the same name *more than once* inside a complex type declaration.

XMLBeans Parser Classes

Overview

This subsection summarizes the most important XMLBeans parser classes, which you are likely to use while parsing an XML schema type in WSDLGen.

The following XMLBeans classes are summarized here:

- `org.apache.xmlbeans.SchemaTypeLoader`
 - `org.apache.xmlbeans.SchemaGlobalElement`
 - `org.apache.xmlbeans.SchemaType`
 - `org.apache.xmlbeans.SchemaProperties`
-

SchemaTypeLoader

The `org.apache.xmlbeans.SchemaTypeLoader` class is used to find specific nodes in the XMLBeans parse tree. In particular, you can use it to find element nodes and type nodes. The most useful methods from the `SchemaTypeLoader` class are shown in [Table 18](#).

Table 18: *Methods from the SchemaTypeLoader Class*

Method Signature	Description
<pre>SchemaGlobalElement findElement(javax.xml.namespace.QName name)</pre>	Returns the global element definition with the given name, or null if none.
<pre>SchemaType findType(javax.xml.namespace.QName name)</pre>	Returns the type with the given name, or null if none.

SchemaGlobalElement

The `org.apache.xmlbeans.SchemaGlobalElement` class represents an element node in the XMLBeans parse tree. The most useful methods from the `SchemaGlobalElement` class are shown in [Table 19](#).

Table 19: *Methods from the SchemaGlobalElement Class*

Method Signature	Description
<code>javax.xml.namespace.QName getName()</code>	Returns the form-unqualified-or-qualified name.
<code>SchemaType getType()</code>	Returns the type.
<code>java.math.BigInteger getMinOccurs()</code>	Returns the <code>minOccurs</code> value for this particle.
<code>java.math.BigInteger getMaxOccurs()</code>	Returns the <code>maxOccurs</code> value for this particle, or null if it is unbounded.
<code>boolean isNillable()</code>	True if nillable; always false for attributes.
<code>String getSourceName()</code>	The name of the source file in which this component was defined (if known).

SchemaType

The `org.apache.xmlbeans.SchemaType` class represents a type node in the XMLBeans parse tree. The most useful methods from the `SchemaType` class are shown in [Table 20](#).

Table 20: *Methods from the SchemaType Class*

Method Signature	Description
<code>SchemaStringEnumEntry enumEntryForString(String s)</code>	Returns the string enum entry corresponding to the given enumerated string, or null if there is no match or this type is not a string enumeration.
<code>StringEnumAbstractBase enumForInt(int i)</code>	Returns the string enum value corresponding to the given enumerated string, or null if there is no match or this type is not a string enumeration.
<code>StringEnumAbstractBase enumForString(String s)</code>	Returns the string enum value corresponding to the given enumerated string, or null if there is no match or this type is not a string enumeration.
<code>SchemaType[] getAnonymousTypes()</code>	The array of inner (anonymous) types defined within this type.
<code>int getAnonymousUnionMemberOrdinal()</code>	For anonymous types defined inside a union only: gets the integer indicating the declaration order of this type within the outer union type, or zero if this is not applicable.
<code>SchemaAttributeModel getAttributeModel()</code>	Returns the attribute model for this complex type (with simple or complex content).
<code>SchemaProperty[] getAttributeProperties()</code>	Returns all the <code>SchemaProperties</code> corresponding to attributes.
<code>SchemaProperty getAttributeProperty(QName attrName)</code>	Returns a <code>SchemaProperty</code> corresponding to an attribute within this complex type by looking up the attribute name.
<code>SchemaType getAttributeType(QName eltName, SchemaTypeLoader wildcardTypeLoader)</code>	Returns the type of an attribute based on the attribute name and the type system within which (wildcard) names are resolved.

Table 20: *Methods from the SchemaType Class (Continued)*

Method Signature	Description
<code>QName getAttributeTypeAttributeName()</code>	Returns the attribute QName if this is an attribute type, or null otherwise.
<code>SchemaType getBaseEnumType()</code>	If this is a string enumeration, returns the most basic base schema type that this enumeration is based on.
<code>SchemaType getBaseType()</code>	Returns base restriction or extension type.
<code>SchemaType getContentBasedOnType()</code>	For complex types with simple content returns the base type for this type's content.
<code>SchemaParticle getContentModel()</code>	Returns the complex content model for this complex type (with complex content).
<code>int getContentType()</code>	Returns <code>EMPTY_CONTENT</code> , <code>SIMPLE_CONTENT</code> , <code>ELEMENT_CONTENT</code> , or <code>MIXED_CONTENT</code> for complex types.
<code>int getDecimalSize()</code>	For atomic numeric restrictions of decimal only: the numeric size category.
<code>int getDerivationType()</code>	Returns an integer for the derivation type, either <code>DT_EXTENSION</code> , <code>DT_RESTRICTION</code> , <code>DT_NOT_DERIVED</code> .
<code>SchemaProperty[] getDerivedProperties()</code>	Returns the SchemaProperties defined by this complex type, exclusive of the base type (if any).
<code>SchemaProperty[] getElementProperties()</code>	Returns all the SchemaProperties corresponding to elements.
<code>SchemaProperty getElementProperty(QName eltName)</code>	Returns a SchemaProperty corresponding to an element within this complex type by looking up the element name.
<code>SchemaType getElementType(QName eltName, QName xsiType, SchemaTypeLoader wildcardTypeLoader)</code>	Returns the type of a child element based on the element name and an <code>xsi:type</code> attribute (and the type system within which names are resolved).
<code>XmlAnySimpleType[] getEnumerationValues()</code>	Returns the array of valid objects from the enumeration facet, null if no enumeration defined.

Table 20: *Methods from the SchemaType Class (Continued)*

Method Signature	Description
<code>SchemaType getListItemType()</code>	For list types only: get the item type.
<code>QName getName()</code>	The name used to describe the type in the schema.
<code>SchemaType getPrimitiveType()</code>	For atomic types only: get the primitive type underlying this one.
<code>SchemaProperty[] getProperties()</code>	For atomic types only: get the primitive type underlying this one.
<code>int getSimpleVariety()</code>	Returns whether the simple type is ATOMIC, UNION, or LIST.
<code>SchemaStringEnumEntry[] getStringEnumEntries()</code>	Returns the array of <code>SchemaStringEnumEntries</code> for this type: this array includes information about the java constant names used for each string enum entry.
<code>SchemaTypeSystem getTypeSystem()</code>	Returns the <code>SchemaTypeLoader</code> in which this type was defined.
<code>SchemaType getUnionCommonBaseType()</code>	For union types only: get the most specific common base type of the constituent member types.
<code>SchemaType[] getUnionConstituentTypes()</code>	For union types only: get the constituent member types.
<code>SchemaType[] getUnionMemberTypes()</code>	For union types only: get the shallow member types.
<code>SchemaType[] getUnionSubTypes()</code>	For union types only: gets the full tree of member types.
<code>boolean hasAllContent()</code>	True if the complex content model for this complex type is an all group.
<code>boolean hasAttributeWildcards()</code>	True if this type permits wildcard attributes.
<code>boolean hasElementWildcards()</code>	True if this type permits element wildcards.
<code>boolean hasPatternFacet()</code>	True if there are regular expression pattern facets.
<code>boolean hasStringEnumValues()</code>	True if this is a string enum where an integer is assigned to each enumerated value.
<code>boolean isAnonymousType()</code>	True if the Xsd type is anonymous (i.e., not top-level).
<code>boolean isAttributeType()</code>	True if this is a attribute type.

Table 20: *Methods from the SchemaType Class (Continued)*

Method Signature	Description
<code>boolean isBounded()</code>	True if bounded.
<code>boolean isBuiltinType()</code>	True for any of the 40+ built-in types.
<code>boolean isNoType()</code>	True for the type object that represents a the absence of a determined type.
<code>boolean isNumeric()</code>	True if numeric.
<code>boolean isPrimitiveType()</code>	True for any of the 20 primitive types (plus <code>anySimpleType</code>).
<code>boolean isSimpleType()</code>	True for the <code>anySimpleType</code> and any restrictions/unions/lists.
<code>boolean isURType()</code>	True for <code>anyType</code> and <code>anySimpleType</code> .
<code>boolean matchPatternFacet(String s)</code>	True if the given string matches the pattern facets.
<code>int ordered()</code>	True if ordered.
<code>QNameSet qnameSetForWildcardAttributes()</code>	Returns a <code>QNameSet</code> of attributes that may exist in wildcard buckets and are not explicitly defined in this schema type.
<code>QNameSet qnameSetForWildcardElements()</code>	Returns a <code>QNameSet</code> of elements that may exist in wildcard buckets and are not explicitly defined in this schema type.

SchemaProperties

The `org.apache.xmlbeans.SchemaProperties` class represents a summary of the element definitions that *share the same name* within a complex type definition. Rather than having to look up the properties for all of the different element fields that have the same name, it is usually simpler to obtain the relevant `SchemaProperties` object. The `SchemaProperties` object attempts to unify the properties of the same-name elements in a consistent manner.

The most useful methods from the `SchemaProperties` class are shown in [Table 20](#).

Table 21: *Methods from the SchemaProperties Class*

Method Signature	Description
<code>SchemaType getContainerType()</code>	The type within which this property appears.
<code>String getDefaultText()</code>	Returns the default or fixed value, if it is consistent.
<code>XmlAnySimpleType getDefaultValue()</code>	Returns the default or fixed value as a strongly-typed value, if it is consistent.
<code>BigInteger getMaxOccurs()</code>	Returns a summarized maximum occurrence number.
<code>BigInteger getMinOccurs()</code>	Returns a summarized minimum occurrence number.
<code>QName getName()</code>	The name of this element or attribute.
<code>SchemaType getType()</code>	The schema type for the property.
<code>int hasDefault()</code>	Returns NEVER, VARIABLE, or CONSISTENTLY defaulted, depending on the defaults present in the elements in this property.
<code>int hasFixed()</code>	Returns NEVER, VARIABLE, or CONSISTENTLY fixed, depending on the fixed constraints present in the elements in this property.
<code>int hasNillable()</code>	Returns NEVER, VARIABLE, or CONSISTENTLY nillable, depending on the nillability of the elements in this property.
<code>boolean isAttribute()</code>	True for attributes.
<code>boolean isReadOnly()</code>	True for read-only properties.

Java Utility Classes

For your convenience, this appendix summarizes some standard Java utility classes that are used extensively throughout the WSDLGen scripts.

In this appendix

This appendix discusses the following topics:

Useful Java Utility Classes

page 74

Useful Java Utility Classes

Overview

There are a few Java utility classes that are extensively used in the WSDLGen scripts, as follows:

- `javax.xml.namespace.QName`
- `java.util.Map`
- `java.util.Collection`
- `java.util.Iterator`
- `java.util.List`
- `java.util.ListIterator`

For your convenience, the API for these utility classes is summarized here. This summary does not include all of the methods in these classes, however. For the complete Java API, consult the Javadoc reference on Sun's Web site:

<http://java.sun.com/j2se/1.5.0/docs/api/>

`javax.xml.namespace.QName`

The `javax.xml.namespace.QName` class includes the methods shown in [Table 22](#).

Table 22: *Some Methods and Constructors from QName*

Method/Constructor Signature	Description
<code>QName(String localPart)</code>	Construct a QName that has no namespace.
<code>QName(String namespaceURI, String localPart)</code>	Construct a QName consisting of a namespace URI and a local part.
<code>QName(String namespaceURI, String localPart, String Prefix)</code>	Constructor with namespace prefix (the prefix is not very important in the context of WSDL parsing).
<code>String getLocalPart()</code>	Get the local part of the QName.
<code>String getNamespaceURI</code>	Get the namespace URI of the QName.
<code>String getPrefix</code>	Get the prefix (rarely needed).
<code>String toString()</code>	Return <code>"{" + namespaceURI + "}" + localPart</code> .

java.util.Map

The `java.util.Map<K,V>` class includes the methods shown in [Table 23](#).

Table 23: *Some Methods from java.util.Map*

Method Signature	Description
<code>put(K key, V value)</code>	Add a new entry to the map.
<code>V get(Object key)</code>	Use the key to look up a value in the map.
<code>java.util.Collection<V> values()</code>	If you want to iterate over all of the values in the map, it is necessary to convert it to a collection first.
<code>boolean isEmpty()</code>	True, if the map is empty.
<code>int size()</code>	Return the number of entries in the map.

java.util.Collection

The `java.util.Collection<E>` class includes the methods shown in [Table 24](#).

Table 24: *Some Methods from java.util.Collection*

Method Signature	Description
<code>java.util.Iterator<E> iterator()</code>	Return an iterator, which can be used to iterate over all members of the collection.

java.util.Iterator

The `java.util.Iterator<E>` class includes the methods shown in [Table 25](#).

Table 25: *Some Methods from java.util.Iterator*

Method Signature	Description
<code>boolean hasNext()</code>	True, if a call to <code>next()</code> would return another element in the collection.
<code>E next()</code>	Return the next element in the collection and increment the iterator index.

java.util.List

The `java.util.List<E>` class includes the methods shown in [Table 26](#).

Table 26: *Some Methods from java.util.List*

Method Signature	Description
<code>Object [] toArray()</code>	Convert the list to an array.
<code>java.util.ListIterator listIterator()</code>	Return an iterator, which you can use to iterate over all of the list members.
<code>boolean isEmpty()</code>	True, if the list is empty.
<code>int size()</code>	Return the number of list members.

java.util.ListIterator

The `java.util.ListIterator<E>` class, which is a bidirectional iterator, includes the methods shown in [Table 27](#).

Table 27: *Some Methods from java.util.ListIterator*

Method Signature	Description
<code>boolean hasNext()</code>	True, if a call to <code>next()</code> would return another list member.
<code>E next()</code>	Return the next member of the list and increment the iterator index.
<code>boolean hasPrevious()</code>	True, if a call to <code>previous()</code> would return another list member.
<code>E previous()</code>	Return the previous member of the list and decrement the iterator index.

Index

A

- ant build file
 - generating 17
- architecture
 - of WSDLGen 12
- array 32, 34
- artixInstall property 16

B

- bilingual file
 - jsb file suffix 24
- bilingual files
 - and wsdlgen utility 15
 - closeOutputFile() method 27
 - definition 24
 - escape characters 28
 - including 36
 - indentation level 37
 - openOutputFile() method 27
 - output text delimiters 28
 - overview 26
- bindingName property 16, 31

C

- character literals
 - dollar and at sign 30
- closeOutputFile() method 27
- Collection class 75
- com.iona.wsdlgen.common.ParametersList class 32
- configuration
 - and wsdlgen utility 14
 - smart loader path 36
- custom templates
 - writing 24

D

- Definition class 49, 59
- delimiters
 - output text, in bilingual files 28
- DIRECTION_IN 35
- DIRECTION_OUT 35
- document/literal wrapped style
 - parsing 51

E

- escape character
 - dollar sign 29
- escape characters
 - at sign 30
 - escaping the 30
 - in bilingual files 28

F

- Fault class 61
- fault handling
 - faults() method 35
 - getPartsAndFaults() method 35
- faults() method 35

G

- getDirection() method 35
- getPart() method 35
- getPartsAndFaults() method 35

I

- including bilingual files 36
- indentation level 37
- Input class 61
- intfName variable 31
- Iterator class 75

J

java.util.Collection class 75
 java.util.Iterator class 75
 java.util.List class 76
 java.util.ListIterator class 76
 java.util.Map class 75
 javaIntfName variable 31
 javaModel variable 31
 javaPackage variable 31
 JavaScript
 bilingual files 26
 plug-in 13
 predefined objects 24
 properties, specifying on command line 14
 Rhino implementation of 47
 javaServiceName variable 32
 javax.wsdl.Definition class 49, 59
 javax.wsdl.Fault class 61
 javax.wsdl.Input class 61
 javax.wsdl.Message class 62
 javax.wsdl.Operation class 32, 60
 javax.wsdl.Output class 61
 javax.wsdl.Part class 57, 62
 javax.wsdl.PortType class 60
 javax.xml.namespace.QName class 74
 jaxwsIntfName variable 32
 jaxwsServiceName variable 32
 jsb file suffix 24
 jsModel object 32
 JWSDL
 in WSDLGen architecture 12
 JWSDL parser
 API 55

L

line escape 30
 List class 76
 ListIterator class 76

M

Map class 75

Message class 62
 message direction
 DIRECTION_IN 35
 DIRECTION_OUT 35
 message URL http
 //www.ecma-international.org/publications/
 standards/Ecma-262.htm 13

O

openOutputFile() method 27
 Operation class 60
 org.apache.xmlbeans.SchemaGlobalElement class 66
 org.apache.xmlbeans.SchemaProperties class 71
 org.apache.xmlbeans.SchemaType class 67
 org.apache.xmlbeans.SchemaTypeLoader class 50, 65
 Output class 61

P

parametersList object 32, 35
 parser objects 34
 Part class 57, 62
 path
 for smart loader utility 36
 plug-ins
 JavaScript 13
 portName property 16, 32
 PortType class 60
 portType property 16, 32
 predefined objects 24
 list of 31
 parser objects 34

Q

QName class 74

R

randomizer object 33
 Rhino 47
 RPC/literal style
 parsing 53

S

- SchemaGlobalElement class 66
- schemaModel object 33
 - and XMLBeans parser 49
- SchemaProperties class 71
- SchemaType class 67
- SchemaTypeLoader class 50, 65
- serviceName property 16, 33
- smartLoad() method 36
- smart loader
 - configuring the path 36
- smartLoader utility 33
- smart loader utility
 - how to use 36
- stub code
 - generating 17

T

- templates
 - in WSDLGen architecture 13
- tns variable 33

V

- variable escape 29

W

- WSDL4J 46
- wsdFile variable 33
- wsdngen utility
 - artixInstall property 16
 - bindingName property 16
 - portName property 16
 - portType property 16
 - serviceName property 16
 - syntax 14
- wsdModel object 33
 - and JWSDL parser 49

X

- XMLBeans 46
 - in WSDLGen architecture 12

