



Orbix[®] 3.3

Core Services Installation Guide

Service Pack 8, February 2006

IONA Technologies PLC and/or its subsidiaries may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this publication. Except as expressly provided in any written license agreement from IONA Technologies PLC, the furnishing of this publication does not give you any license to these patents, trademarks, copyrights, or other intellectual property. Any rights not expressly granted herein are reserved.

IONA, IONA Technologies, the IONA logo, Orbix, Orbix Mainframe, Orbix Connect, Artix, Artix Mainframe, Artix Mainframe Developer, Mobile Orchestrator, Orbix/E, Orbacus, Enterprise Integrator, Adaptive Runtime Technology, and Making Software Work Together are trademarks or registered trademarks of IONA Technologies PLC and/or its subsidiaries.

Java and J2EE are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. CORBA is a trademark or registered trademark of the Object Management Group, Inc. in the United States and other countries. All other trademarks that appear herein are the property of their respective owners.

IONA Technologies PLC makes no warranty of any kind to this material including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. IONA Technologies PLC shall not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

COPYRIGHT NOTICE

No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, photocopying, recording or otherwise, without prior written consent of IONA Technologies PLC. No third party intellectual property right liability is assumed with respect to the use of the information contained herein. IONA Technologies PLC assumes no responsibility for errors or omissions contained in this book. This publication and features described herein are subject to change without notice.

Copyright © 2001–2005 IONA Technologies PLC. All rights reserved.

All products or services mentioned in this manual are covered by the trademarks, service marks, or product names as designated by the companies who market those products.

Updated: 07-Feb-2006

Contents

Chapter 1	Installing Orbix 3.3 SP8 Core Services	1
	Introduction	3
	Prerequisites to Installing Orbix 3.3 SP 8	6
	Installing Orbix 3.3 SP 8 Without the GUI	15
	Installing Orbix 3.3 SP 8 With the GUI	16
	Verifying Your Installation	23
	Uninstalling Orbix 3.3 SP 8	27
	Further Information	28

CONTENTS

Installing Orbix 3.3 SP8 Core Services

This release of Orbix 3.3 SP 8 Core Services is available for Red Hat Linux AS 3.0, Windows 2003 Server, Tru64, AIX 5.2 and AIX 5.3. It supports Orbix Java edition, Orbix C++ edition, and OrbixNames.

For details of installing Orbix 3.3 SP8 on other platforms see the Orbix 3.3 Service Pack 8 Installation Guide.

In this document

This chapter discusses the following topics:

Introduction	page 3
Prerequisites to Installing Orbix 3.3 SP 8	page 6
Installing Orbix 3.3 SP 8 Without the GUI	page 15
Installing Orbix 3.3 SP 8 With the GUI	page 16
Verifying Your Installation	page 23
Uninstalling Orbix 3.3 SP 8	page 27

[Further Information](#)

[page 28](#)

Introduction

Product sets

This document provides instructions for installing Orbix 3.3 SP 8 on Red Hat Linux AS 3.0, Windows XP Professional x64, Windows 2003 Server, Tru64, AIX 5.2 and AIX 5.3.

Note: For details of installing Orbix 3.3 SP 8 on other platforms see the *Orbix 3.3 Service Pack 8 Installation Guide*.

Orbix 3.3 SP 8 consists of two product sets, each enabled by separate license codes:

- Orbix 3.3 SP 8 Java Edition
- Orbix 3.3 SP 8 C++ Edition

You may purchase and license any valid combination of these sets.

Product components

Orbix 3.3 SP 8 comprises the following components:

Components	Linux	HP-UX 11.00, 11i, and IA64	Tru64	AIX 5.2 and 5.3	Microsoft Windows 2003 Server	Microsoft Windows XP x64
Development Platform for Java	Available	Available	Available	Available	Available	Available
Development Platform for C++	Available	Available	Available	Available	Available	Available
OrbixNames	Available	Available	Available	Available	Available	Available

JRE requirements

The Orbix 3.3 SP 8 installation was built with InstallAnywhere, which is a Java application. The installer requires a JRE (Java Runtime Environment). You should provide the JRE yourself (see Installation Prerequisites), or use a pre-installed JRE or JDK before launching the installer.

Installation steps

To install Orbix 3.3 SP 8 follow these steps:

- Determine your Installation Type.
- Check the Prerequisites to Installing Orbix 3.3 SP 8.
- Install Orbix 3.3 SP 8 on Your Host Machine.
- Verify Your Installation.

Before You Begin Your Installation

Before you install Orbix 3.3 SP 8, we recommend that you read the *Orbix 3.3 SP 8 Release Notes*.

Note: Orbix 3.3 SP 8 cannot be installed on machines that do not support 256 (8 bit) colors, because the Orbix installer is a Java application built on the Java platform which does not support 16 colors. For more information see <http://java.sun.com/products/jdk/1.2/changes.html#2D>.

Note: When installing Orbix 3.3 SP 8 using PCAnywhere (that is via a remote client) the following display information must be followed: "Display resolution of type VGA (640 x 480). For more information see ftp://ftp.symantec.com/public/english_us_canada/products/pcanywhere/pcanywhere32/ver10.5/manuals/pca_105_user.pdf.

Orbix 3.3 SP 8 License Codes

You must have a valid license code from IONA to install Orbix 3.3 SP 8 Java edition, Orbix 3.3 SP 8 C++ edition, and OrbixNames. The code is a long numeric string taking the general form:

```
00000000-11111111-22222222-33333333-44444444
```

Your license code should be included in a loose sheet in your Orbix 3.3 SP 8 pack. Otherwise, as Orbix 3.3 SP 8 is a service pack release of Orbix 3.3, the license codes provided for Orbix 3.3 are valid for Orbix 3.3 SP 8. If you do not have any license codes, please contact IONA before proceeding any further.

Determine Your Installation Type

Orbix 3.3 SP 8 comprises two product sets: Orbix 3.3 SP 8 Java edition and Orbix 3.3 SP 8 C++ edition. You can purchase the Java edition and the C++ edition separately or together.

Component	Java Edition	C++ Edition
Development Platform for Java	Enabled	-
Development Platform for C++	-	Enabled

Prerequisites to Installing Orbix 3.3 SP 8

Existing Orbix Installations

If you install Orbix 3.3 SP 8 in the same location as an existing Orbix installation, the existing installation is overwritten. If you have an older version of Orbix on your system and you do not want it overwritten, you should install Orbix 3.3 SP 8 in a new location on your file system.

Installation Prerequisites

Prerequisite	Notes
Privileges	<p>General</p> <p>To install in a non-default location, you must have permission to create files and directories in that location.</p> <p>UNIX</p> <p>To install into the default location, UNIX users must have root privileges.</p>
UNIX DISPLAY	<p>The Installer was built using InstallAnywhere, which is a GUI application. To install Orbix 3.3 SP 8 without the GUI, follow the instructions in Installing Orbix 3.3 SP 8 Without the GUI.</p> <p>For a GUI application to run on UNIX you will need to install on a UNIX host with X and a windowing environment configured. You will need to ensure your display environment variable is set to the workstation you are logged into. For example, set the following environment variable, substituting the full Domain Name System (DNS) name of your workstation for</p> <pre>imaginary.dublin.iona.ie: export DISPLAY=imaginary.dublin.iona.ie:0.0</pre> <p>Contact your system administrator if you require assistance with this.</p>

Prerequisite	Notes
JRE	<p>The Installer was built using InstallAnywhere, which is a Java application. For it to run it needs a JRE (Java Runtime Environment). You are also required to provide the location of the JRE in order for the installation to run. The versions mentioned here are those built and tested on the operating system.</p> <p>The JRE is available from:</p> <p>Windows JRE</p> <p>The Windows Installer includes a JRE (version 1.5.0_03).</p> <p>HP-UX JRE</p> <p>HP-UX users can obtain the JRE version 1.3.1_16 from:</p> <p>http://www.hp.com/products1/unix/java/</p> <p>Be sure to install all required patches.</p> <p>HP-UX IA64</p> <p>HP-UX users can obtain the JRE version 1.3.1.16 from:</p> <p>http://www.hp.com/products1/unix/java/</p> <p>Be sure to install all required patches.</p> <p>Linux</p> <p>http://java.sun.com/downloads/index.html</p> <p>Be sure to install all required patches.</p> <p>Solaris</p> <p>http://java.sun.com/downloads/index.html</p> <p>Be sure to install all required patches.</p> <p>AIX</p> <p>http://www-128.ibm.com/developerworks/java/jdk/aix/service.html</p> <p>Be sure to install all required patches.</p>

Prerequisite	Notes
	TRU64 http://www.compaq.com/java/download/index.htm <u>1</u> Be sure to install all required patches.
Domain Name	The installer requires your domain name for Orbix 3.3 SP 8 configuration. The Domain Name System (DNS) to resolve Internet or Unix computer names. Contact your network administrator to obtain the domain name for your TCP/IP internet prior to installing Orbix 3.3 SP 8.

You need access on all platforms to an existing JRE (or JDK) version 1.3.1 or you should obtain and install the JRE yourself on your system prior to running the Installer. See the above table for details on obtaining the JRE.

Operating Systems

In regard to the operating system patches listed in this install guide, Orbix 3.3 SP 8 may work perfectly well without installing all the patches for a particular operating system, but IONA advises that they be installed to reduce the possibility of Orbix 3.3 SP 8 not operating properly because they were not installed.

Please consult specific vendor's websites for more information on patches.

Orbix 3.3 SP 8 runs on the following operating systems:

Operating System	Required Operating System Patches
Red Hat Linux AS 3.0	<p>These patches can be displayed with the following commands:</p> <p>Linux kernel:</p> <p>Command: <code>rpm -q kernel</code></p> <p>Required version: <code>kernel-2.4.21-32.0.1.EL</code></p> <p>GCC 3.2.3 runtime and development environment:</p> <p>Command: <code>rpm -q gcc</code></p> <p>Required version: <code>gcc-3.2.3-52</code></p> <p>Command: <code>rpm -q gcc-c++</code></p> <p>Required version: <code>gcc-c++-3.2.3-52</code></p> <p>Command: <code>rpm -q libstdc++</code></p> <p>Required version: <code>libstdc++-3.2.3-52</code></p> <p>Command: <code>rpm -q libgcc</code></p> <p>Required version: <code>libgcc-3.2.3-52</code></p> <p>Command: <code>rpm -q binutils</code></p> <p>Required version: <code>binutils-2.14.90.0.4-37</code></p> <p>Note: It is recommended to update the system to the latest available packages through the Red Hat Update Agent, which can be executed by typing the command <code>up2date</code> from a shell prompt.</p>
Microsoft Windows 2003 Server	Service Pack 1
Microsoft Windows XP Professional x64 Edition	Service Pack 1

Operating System	Required Operating System Patches
AIX 5.2	<p>Required for JDK 1.3.1</p> <p>These patches can be displayed with the following commands:</p> <pre> lslpp -l grep vacpp lslpp -l grep -i java vacpp.cmp.aix50.lib 6.0.0.0 C F VisualAge C++ Libraries for AIX vacpp.cmp.aix50.tools 6.0.0.0 C F VisualAge C++ Tools for AIX vacpp.cmp.core 6.0.0.0 C F VisualAge C++ Compiler vacpp.cmp.include 6.0.0.0 C F VisualAge C++ Compiler Include vacpp.cmp.lib 6.0.0.0 C F VisualAge C++ Libraries vacpp.cmp.rte 6.0.0.0 C F VisualAge C++ Compiler vacpp.cmp.tools 6.0.0.0 C F VisualAge C++ Tools xlC.cpp 5.0.2.0 C F for AIX Preprocessor bos.rte.streams 5.2.0.30 C F Streams Libraries bos.rte.tty 5.2.0.40 C F Base TTY Support and Commands </pre>

Operating System	Required Operating System Patches
AIX 5.3	<p>Required for JDK 1.3.1</p> <p>These patches can be displayed with the following commands:</p> <pre> lslpp -l grep vacpp lslpp -l grep -i java vacpp.cmp.aix50.lib 6.0.0.0 C F VisualAge C++ Libraries for AIX vacpp.cmp.aix50.tools 6.0.0.0 C F VisualAge C++ Tools for AIX vacpp.cmp.core 6.0.0.0 C F VisualAge C++ Compiler vacpp.cmp.include 6.0.0.0 C F VisualAge C++ Compiler Include vacpp.cmp.lib 6.0.0.0 C F VisualAge C++ Libraries vacpp.cmp.rte 6.0.0.0 C F VisualAge C++ Compiler vacpp.cmp.tools 6.0.0.0 C F VisualAge C++ Tools xlC.cpp 6.0.0.0 C F for AIX Preprocessor bos.rte.streams 5.3.0.0 C F Streams Libraries bos.rte.tty 5.3.0.10 C F Base TTY Support and Commands </pre> <p>April 2007 IBM C++ Runtime Environment Components for AIX</p>

Development Environment Prerequisites

Java Development

Orbix 3.3 SP 8 was built and tested with the following JDK versions.

Platform	Built on (JDK version)	Tested on (JDK version)
Red Hat Linux AS 3.0	1.3.1_16	1.4.2, 5.0
Tru64	1.3.1_16	1.3.1_16, 1.4.2
AIX 5.2	1.3.1_16	1.3.1_16, 1.4.2
AIX 5.3	1.3.1_16	1.3.1_16, 1.4.2
Windows 2003 Server	1.3.1_16	1.3.1, 1.4.2, 1.5.0
Windows XP x64	1.3.1_16	1.5.0_06

C++ Development

Orbix 3.3 SP 8 was built and tested with the following C++ compilers.

Platform	Compiler Built on	Compiler Tested on
Red Hat Linux AS 3.0	g++ (GCC) 3.2.3	g++ (GCC) 3.2.3
Compaq Tru64 5.1a	Compaq C++ v6.2 v6.2-024 (64 bit)	Compaq C++ v6.2 v6.2-024 (64 bit)
AIX 5.2	IBM VisualAge C++ v6.0 PTF2	IBM VisualAge C++ v6.0 PTF2
AIX 5.3	-	IBM VisualAge C++ v6.0 PTF2 IBM XL C/C++ Enterprise Edition V7.0 for AIX (with February 2007 XL C/C++ Enterprise Edition V7.0 for AIX PTF and April 20007 IBM C++ Runtime Environment Components for AIX)
Windows 2003 Server	Microsoft Visual Studio .NET 2003 C/C++ Optimizing Compiler Version 13.10.3077	Microsoft Visual Studio .NET 2003 C/C++ Optimizing Compiler Version 13.10.3077

Platform	Compiler Built on	Compiler Tested on
Windows XP x64	Microsoft Visual Studio 2005 C/C++ Optimizing Compiler Version 14.00.50727.42 for x64	Microsoft Visual Studio 2005 C/C++ Optimizing Compiler Version 14.00.50727.42 for x64

Disk Space Requirements

The following table lists the approximate amount of disk space taken up by the Orbix 3.3 SP 8 files. The install program also requires approximately 50MB of temporary work space.

Component	Linux	Windows
Development Environment for Java & C++	125MB	140MB
Documentation	75MB	75MB

Default Location

The default location of your Orbix 3.3 installation is as follows:

Platform	Default Location
Red Hat Linux AS 3.0 main installation	/opt/iona /var/opt/iona
Tru64 main installation Tru64 variable files	/opt/iona /var/opt/iona
AIX 5.2	/opt/iona /var/opt/iona
AIX 5.3	/opt/iona /var/opt/iona
Windows 2003 Server	C:\iona
Windows XP x64	C:\iona

Note: Orbix 3.3 SP 8 installs in a fixed location relative to the path you specify. IONA does not recommend installation into locations with spaces in their directory names.

Installing Orbix 3.3 SP 8 Without the GUI

Overview

Installing Orbix 3.3 SP 8 without a GUI (silent install mode) allows you to run the installer without using the GUI. The silent mode installer looks to a template file that provides the required information.

For more detailed information on using silent install mode, see Knowledge Base article 4087.633 on the IONA Web site.

Installing in Silent Mode

1. To install in silent mode

```
$ ./install.exe -f template.file
```

Where `template.file` contains the following information.

```
##Specimen properties with operating system Licence codes.
##Use on one combination as per requirement. The first section is in effect now.
##It will install Orbix 3.3 SP 8 Java and C++ edition with OTS
##-----
##C++, Java with OTS
##-----
##Choose the directory where you want Orbix 3.3 SP 8 installed
USER_INSTALL_DIR=/local1/install_dir
##Choose the location of your Java Developemnt Platform
JAVA_LOCATION=/usr/java
JAVA_VERSION=1.3
JAVA_VERSION_1=1.3
ISVALIDJDKPATH=TRUE
INSTALLER_UI=SILENT
##Choose the components of Orbix you want to install
PRODUCTS="Orbix 3.3 - Java Edition and C++ Edition with OrbixOTS 3.3"
## Licence key: c++, java , ots
LICENCE_KEY= "<c++ license key1>", "<java license key2>", "<ots license_key3>"
LICENCE_KEY_1=<Licence Key1>
LICENCE_KEY_2=<License Key2>
LICENCE_KEY_3=<License Key3>
DOMAIN=dublin.iona.ie ##Choose the domain for the installation
DOMAIN_1=dublin.iona.ie
##-----
```


Installing Orbix 3.3 SP 8 With the GUI

Overview


The screens shown in this section refer specifically to Red Hat Linux AS 3.0. However, the same install screen layout is provided for Windows 2003 Server.

Installation steps

1. After the JRE is installed,

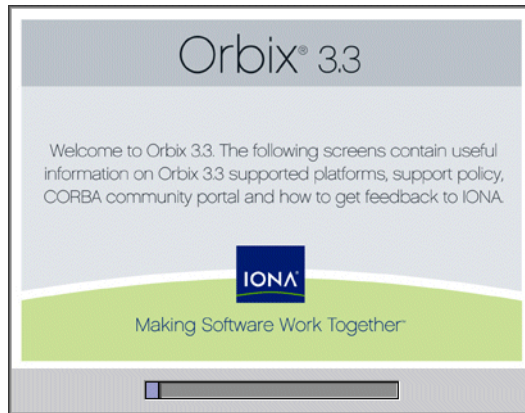

2. In the **Select Product** screen, select the Orbix 3.3 SP 8 product set that you purchased and click **Next** to continue.

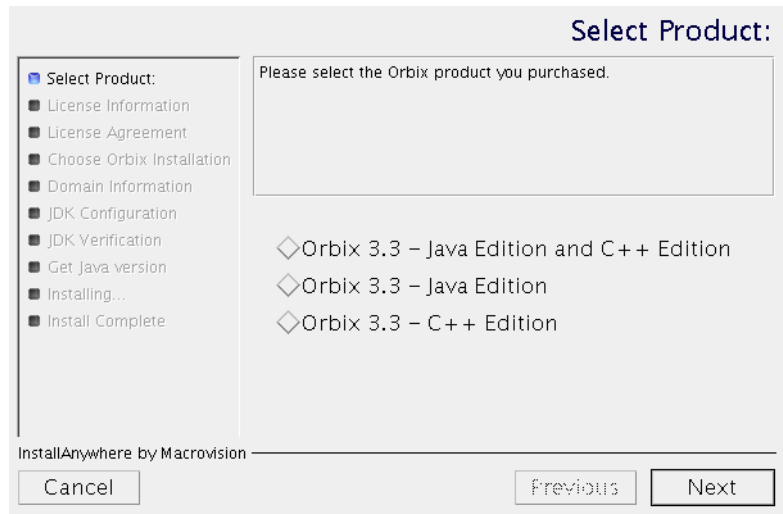

3. In the **License Information** screen, enter the IONA license code(s) you have purchased in the appropriate text field(s). Click **Next** to continue.

The screenshot shows a dialog box titled "License Information". On the left side, there is a vertical list of steps: "Select Product:", "License Information" (which is selected with a blue square), "License Agreement", "Choose Orbix Installation", "Domain Information", "JDK Configuration", "JDK Verification", "Get Java version", "Installing...", and "Install Complete". The main area of the dialog contains a text box with the prompt "Please enter your IONA license authorisation codes:". Below this, there are two input fields: "C++ Edition" and "Java Edition". At the bottom of the dialog, there are three buttons: "Cancel", "Previous", and "Next". The text "InstallAnywhere by Macrovision" is visible at the bottom left of the dialog area.

The license keys requested here will depend on the product set you selected in the previous screen.

4. In the **License Agreement** screen, click **Yes** to agree to the terms of the License Agreement then click **Next** to continue.

5. In the **Orbix Installation Folder** screen, enter the file location that you wish to install Orbix 3.3 SP 8 into, and click **Next** to continue.

Choose Orbix Installation Folder

Select Product:
 License Information
 License Agreement
 Choose Orbix Installation
 Domain Information
 JDK Configuration
 JDK Verification
 Get Java version
 Installing...
 Install Complete

This installer will create an opt/iona directory in the folder you choose.


Note: If you have an older version of Orbix on your system you should not install Orbix 3.3 in the same location on your file system.

Please Choose Orbix Installation folder


InstallAnywhere by Macrovision

Note: You must have permission to create files and directories in this location.

6. In the **Domain Information** screen, enter your domain information, and click **Next** to continue.

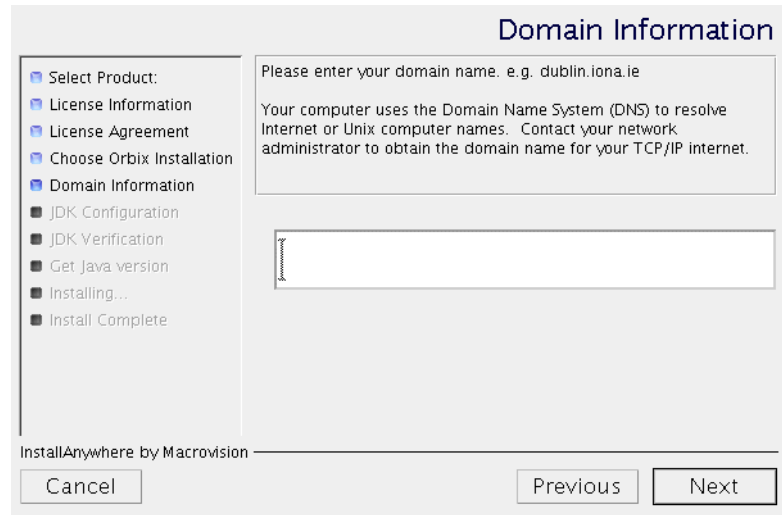


7. In the **JDK Configuration** screen, enter the location of your Java Development Kit. This is not required for Orbix 3.3 SP 8 C++ edition.

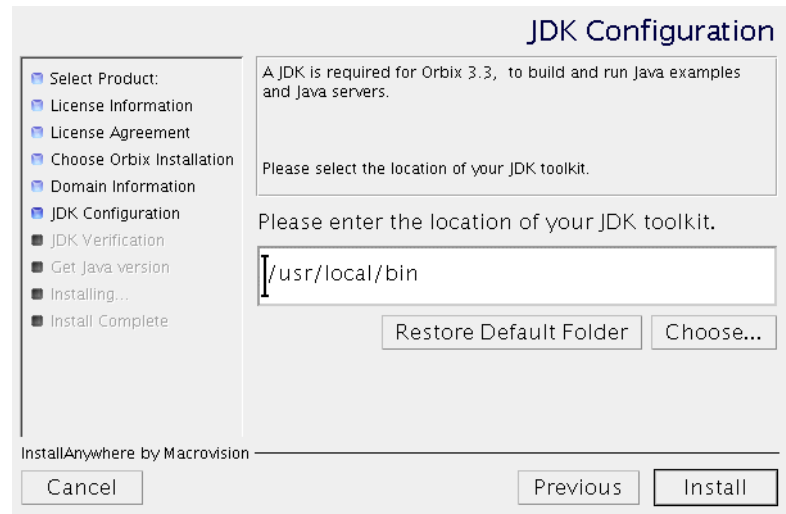

Click **Next** to continue.

8. In the **Get Java Version** screen, select the version of your Java Development Kit, and click **Next** to continue.

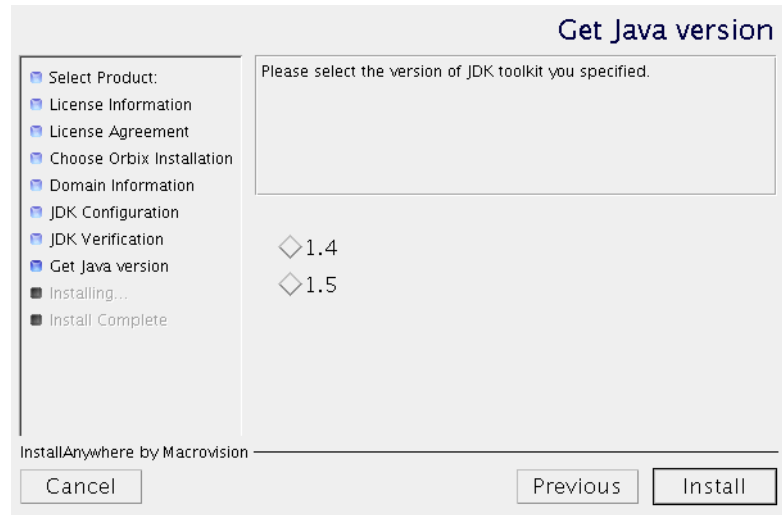

9. A progress bar will be displayed while the files are installed.
10. After the installation is complete the Orbix Welcome Page launches automatically.
11. The **Install Complete** screen is displayed to confirm that the installation is finished. Click **Done** to finish the installation.

Verifying Your Installation

Configuration Checks

When the installation is complete, follow these steps to ensure correct operation:

1. Check the contents of the Orbix configuration files, to ensure that the specified directory paths and domain name match those for your site.

Platform	Location
UNIX	/opt/iona/config/iona.cfg /opt/iona/config/common.cfg /opt/iona/config/orbix3.cfg /opt/iona/config/orbixweb3.cfg /opt/iona/config/orbixnames3.cfg
Windows 2003 Server	C:\iona\config\iona.cfg C:\iona\config\common.cfg C:\iona\config\orbix3.cfg C:\iona\config\orbixweb3.cfg C:\iona\config\orbixnames3.cfg
Windows XP x64	C:\iona\config\iona.cfg C:\iona\config\common.cfg C:\iona\config\orbix3.cfg C:\iona\config\orbixweb3.cfg C:\iona\config\orbixnames3.cfg

2. Read the *Orbix 3.3 SP 8 Release Notes*.

- Before attempting to run the orbix daemon or the orbix java activator from a terminal or command shell, run the supplied scripts which set the following environment variables `IT_CONFIG_PATH`, `IONA_ROOT`, `JAVAHOME` and `PATH`. The scripts are run by typing the following commands in a terminal:

Platform	Command
UNIX	<code>/opt/iona/setenvs.sh (or setenvs.csh)</code>
Windows 2003 Server	<code>C:\iona\setenvs.bat</code>
Windows XP x64	<code>C:\iona\setenvs.bat</code>

Testing Your Orbix 3.3 SP 8 Java Edition Installation

To ensure that your installation is fully operational, you should change directory to the demos directory of your Orbix 3.3 SP 8 installation, for example:

Platform	Location	Make command
UNIX	<code>/opt/iona/demos/common/jumpstart/basic/java</code>	<code>make</code>
Windows 2003 Server	<code>C:\iona\demos\common\jumpstart\basic\java</code>	<code>make</code>
Windows XP x64	<code>C:\iona\demos\common\jumpstart\basic\java</code>	<code>make</code>

Read the `index.html` file for instructions to run the demonstration program.

Testing Your Orbix 3.3 SP 8 C++ Edition Installation

To ensure that your installation is fully operational, you should change directory to the demos directory of your Orbix 3.3 SP 8 installation, for example:

Platform	Location	Make command
UNIX	/opt/iona/demos/common/jumpstart/basic/cxx	make
Windows 2003 Server	C:\iona\demos\common\jumpstart\basic\cxx	make
Windows XP x64	C:\iona\demos\common\jumpstart\basic\cxx	make

Read the `index.html` file for instructions to run the demonstration program.

Reinstalling the License Code

If the licensed applications fail to run (e.g. `orbixd`, `idl`, `idlj`) you may have made an error in entering your license authorization code. You can reinstall the licence by changing to the bin directory of your Orbix 3.3 SP 8 installation and typing in the following line, using your authorization code as indicated in the example below (replace "orbixd" with the filename of the application that fails to run, and replace `licence_code` with your licence authorization code).

Platform	Command
UNIX	<code>install_license orbixd licence_code</code>
Windows 2003 Server	<code>install_license orbixd licence_code</code>
Windows XP x64	<code>install_license orbixd licence_code</code>

The following Orbix 3.3 SP 8 application files are enabled by the corresponding product license authorization codes:

Application	Java Edition code	C++ Edition code
orbixd - Orbix C++ Daemon	Code enables	Code enables
idl - Orbix C++ IDL compiler	-	Code enables
idlj - Orbix Java IDL compiler	Code enables	-

Structure of Installed Directories

A complete installation of Orbix 3.3 SP 8 will have the following directory structure in the install location:

Directory	Description
\bin	Binary images for all components
\config	Repositories and configuration files for all components
\contrib	Utilities contributed by IONA engineers and partners
\demos	Demonstrations for all components
\docs	Links to the latest information on Orbix 3.3 SP 8
\idl	IDL files
\include	Header files
\lib	Development libraries
\tools	GUI Tools
\UninstallOrbix	Files for uninstalling Orbix 3.3 SP 8

Uninstalling Orbix 3.3 SP 8

To uninstall Orbix 3.3 SP 8 run the UninstallOrbix file in the UninstallOrbix directory of your Orbix 3.3 SP 8 installation, examples are given below:

Platform	Uninstall script
UNIX	/opt/iona/UninstallOrbix/UninstallOrbix
Windows 2003 Server	C:\iona\UninstallOrbix\UninstallOrbix
Windows XP x64	C:\iona\UninstallOrbix\UninstallOrbix

Note: The Uninstaller will remove the complete installation of Orbix 3.3 SP 8, but it will not remove any files that were added or generated after installation (for example, log files, executables generated in demo runs, implementation repositories, and so on).

Further Information

If you require further technical assistance in using this product, please contact support@iona.com.